

Basic performance data - WAMAK TBW 73 EVI

Heating - EN 14511		
Heating capacity [kW]	B0 / W35 (max)	73.6 (36.8 / 73.6)
	B0 / W35 (min)	36.8 (36.8 / 73.6)
	B0 / W34	73.4 (36.7 / 73.4)
Electrical power input [kW]	B0 / W35 (max)	16.8 (8.3 / 16.8)
	B0 / W35 (min)	8.3 (8.3 / 16.8)
	B0 / W34	16.4 (8.1 / 16.4)
Heating efficiency faktor [COP]	B0 / W35 (max)	4.38
	B0 / W35 (min)	4.44
	B0 / W34	4.47
Seasonal space heating energy efficiency - SCOP EN 14825		
Average Climate / Low Temperature [35 °C]	SCOP	4.94
	η [%]	197.5
	Label	A+++
	Qhe [kWh]	30751.5
	Pdesignh [kW]	73.6
	Tbivalent [°C]	-10
Cooling		
Cooling capacity - [kW]	A35 / W23-18	74.8
	A25 / W23-18	78.1
	A35 / W12-7	74.8
	A25 / W12-7	74.8
Seasonal space cooling energy efficiency - SEER EN 14825		
[W 23 / 18 °C]	SEER	5.09
	Qce [kWh]	8260.9
	η_c [%]	203.5
Sound EN 12102		
Acoustic power - Lw	dB(A)	62.1
Acoustic pressure - Lp	1 m dB(A)	54.1
	5 m dB(A)	40.1
	10 m dB(A)	34.1
Mechanical and operational information		
Compressor type (3~ 400/50)	SCROLL / 2 /	On/Off
Refrigerant	R410A (GWP - 2088)	9.9 kg
Operating limit temperatures heating - (min / max) [°C]		25 / 65
Operating limit temperatures source - (min / max) [°C]		-10 (7) / 30
Weight		435 kg

Main technical data - WAMAK TBW 73 EVI

Enclosure type			VN1100			Heat energy rejection side data										
Basic dimensions	Height [mm]	1270	Operating limit temperatures heating	MAX [°C]	65	for more see operating limits diagram	Condenser	Port size	VIC 2.1/2 "							
	Width [mm]	1100		MIN [°C]	25			Type	BPHE							
	Length [mm]	750		Count	1			Material	AISI 316							
Weight [kg]	435		Maximal operating pressure - refrigerant [bar]	50		for more see operating limits diagram	Maximal operating pressure - Water [bar]	6								
Colour	Gray		Testing pressure [bar]	70				Heat transfer medium	Water							
Enclosure IP Class	IP20		Volume flow @ dT 5K (nom) - Water [m3/h]	6.36 ~ 12.72					Internal pressure drop - Water [kPa]	20						
Refrigeration cycle			Refrigerant	R410A	Volme	9.9 kg	GWP			2088	Safety class	A1				
Compressor	Type	Scroll						@ 35°C (nom)					5 K			
	Number of stages	2							@ 55°C					8 K		
	On/Off														@ 65°C	10 K
	Power factor Cosφ	0.55														
	Winding resistance	0.83 Ohm														
Refrigeration oil type	POE RL32-3MAF	Renewable energy extraction side data														
	Oil volume	2 x 3.38 L	Operating limit temperatures source	MIN [°C]	-10 (7)											
Maximal pressure - refrigerant [bar]	50			MAX [°C]	30											
	PED class		2		for more see operating limits diagram											
EVI - vapour injection with economizer			Evaporator	Port size		VIC 2.1/2 "										
Electrical connection data				Type		BPHE										
Line voltage [#~ V/Hz]	3~ 400/50			Count	1											
Current	nominal [A]	42.12	Material	AISI 316												
	maximal [A]	64.10	Maximal operating pressure - refrigerant [bar]	29												
	starting [A]	56.91	Heat transfer medium	Ethylenglykol												
Softstart	-		Brine proportion [%]	29												
Main safety	C80		Antifreeze to [°C]	-15												
Control System			Maximal operating pressure - Ethylenglykol [bar]	6												
Main controller	SIEMENS	RVS 61	Volume flow - Ethylenglykol [m3/h]	6.47 ~ 12.93												
Extension module	AVS75.3xx	AVS75.3xx	AVS75.372	Internal pressure drop - Ethylenglykol [kPa]	20											
Bus Clip-In			Modbus	OCI352	Temperature difference - Ethylenglykol	4 K										
Online connection			Web server	OZW672	ToSyMo											
Superheat controller			SEC61													

*** with accessory

WAMAK TBW 73 EVI

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	TBW 73 EVI
Air-to-water heat pump	no
Brine-to-water heat pump	yes
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	low (35°C - 30°C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	73.6	kW	Seasonal space heating energy efficiency	η_s	197.5	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	73.4	kW	Tj = -7 °C	COPd	4.47	-
Tj = +2 °C	Pdh	72.8	kW	Tj = +2 °C	COPd	4.9	-
Tj = +7 °C	Pdh	72.3	kW	Tj = +7 °C	COPd	5.2	-
Tj = +12 °C	Pdh	71.6	kW	Tj = +12 °C	COPd	5.6	-
Tj = bivalent temperature	Pdh	73.6	kW	Tj = bivalent temperature	COPd	4.4	-
Tj = operation limit temperature	Pdh	---	kW	Tj = operation limit temperature	COPd	---	-
Bivalent temperature	Tbiv	-10	°C	Tj = operation limit temperature	TOL	---	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.010	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	14.3	kW
Standby mode	Psb	0.010	kW	Type of energy input			electricity
Crankcase heater mode	Pck	0.000	kW				
Other items				For air-to-water heat pumps: Rated air flow rate, outdoors	-	---	m ³ /h
Capacity control		multi-stage		For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	6.47 ~ 12.93	m ³ /h
Sound power level							
indoors	Lwa	62	dB				
outdoors	Lwa	---	dB				
Annual energy consumption	Q _{HE}	30751.5	kWh				

Contact details: WAMAK, s.r.o., Orovnicca 252, 96652, Orovnicca, Slovakia, info@wamak.sk

WAMAK TBW 73 EVI

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	TBW 73 EVI
Air-to-water heat pump	no
Brine-to-water heat pump	yes
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	middle (55°C - 47°C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	76.2	kW	Seasonal space heating energy efficiency	η_s	158.0	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	76.4	kW	Tj = -7 °C	COPd	3.23	-
Tj = +2 °C	Pdh	76.0	kW	Tj = +2 °C	COPd	4.1	-
Tj = +7 °C	Pdh	74.4	kW	Tj = +7 °C	COPd	4.5	-
Tj = +12 °C	Pdh	73.7	kW	Tj = +12 °C	COPd	4.9	-
Tj = bivalent temperature	Pdh	76.2	kW	Tj = bivalent temperature	COPd	2.8	-
Tj = operation limit temperature	Pdh	---	kW	Tj = operation limit temperature	COPd	---	-
Bivalent temperature	Tbiv	-10	°C	Tj = operation limit temperature	TOL	---	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.010	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	14.3	kW
Standby mode	Psb	0.010	kW	Type of energy input			electricity
Crankcase heater mode	Pck	0.000	kW				
Other items				For air-to-water heat pumps: Rated air flow rate, outdoors	-	---	m ³ /h
Capacity control		multi-stage		For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	6.47 ~ 12.93	m ³ /h
Sound power level							
indoors	Lwa	62	dB				
outdoors	Lwa	---	dB				
Annual energy consumption	Q _{HE}	39810.5	kWh				

Contact details: WAMAK, s.r.o., Orovnicna 252, 96652, Orovnicna, Slovakia, info@wamak.sk



ENERG Y IIA
 енергия - ενεργεια IE IA

WAMAK

TBW 73 EVI



55 °C

35 °C



A+++

A+++



62 dB



--- dB

■ 81
 ■ 77
 ■ 75
 kW

■ 76
 ■ 74
 ■ 70
 kW



2019

811/2013

TBW 73 EVI

ErP Data

	55 °C	35 °C
Energy class	A+++	A+++
η [%]	158.0	197.5
P_{rated} [kW]	77	74
Q_{HE} [kWh/y]	39811	30752
SCOP [-]	3.95	4.94
$T_{bivalent}$ [°C]	-10	-10

CONTROLLER



+ QAA55/75
 - QAA55/75

class VII
 class III

3.5% ↓
 1.5% ↓

Heating performance data

Version: v2024.010-BW-WW

Source - Brine [0°C] / Low Temperature [35°C]

ZHI35K1P-TFD_R410A_2_BWW

Operating conditions		Qh	P	COP
1	B0 / W30-35	73.6	16.8	4.38
2	B0 / W30-35 (MIN)	36.8	8.3	4.44
A	B0 / Wxx-34	73.4	16.4	4.47
B	B0 / Wxx-30	72.8	15.0	4.85
C	B0 / Wxx-27	36.1	6.9	5.24
D	B0 / Wxx-24	35.8	6.4	5.59
E	B0 / Wxx-35	73.6	16.8	4.38
F	B0 / Wxx-35	73.6	16.8	4.38

SCOP DATA EN 14825:2018	
Source - Brine [0°C] / Low Temperature [35°C]	
SCOPon	4.94
SCOPnet	4.94
SCOP	4.94
η [%]	197.51
Label	A+++
Qh [kWh]	30751
Pdesignh [kW]	73.6
Tbivalent [°C]	-10

Source - Brine [0°C] / Medium Temperature [55°C]

Operating conditions		Qh	P	COP
1	B0 / W47-55	76.2	27.0	2.83
2	B0 / W47-55 (MIN)	38.1	13.1	2.86
A	B0 / Wxx-52	76.4	24.4	3.23
B	B0 / Wxx-42	76.0	18.9	4.08
C	B0 / Wxx-36	37.2	8.2	4.54
D	B0 / Wxx-30	36.9	7.4	4.99
E	B0 / Wxx-55	76.2	27.0	2.83
F	B0 / Wxx-54	76.6	25.1	3.06

SCOP DATA EN 14825:2018	
Source - Brine [0°C] / Medium Temperature [55°C]	
SCOPon	3.95
SCOPnet	3.95
SCOP	3.95
η [%]	158.00
Label	A+++
Qh [kWh]	39811
Pdesignh [kW]	76.2
Tbivalent [°C]	-10

Source - Water [10°C] / Low Temperature [35°C]

Operating conditions		Qh	P	COP
1	W10 / W30-35	93.0	16.5	5.62
2	W10 / W30-35 (MIN)	46.5	8.2	5.70
A	W10 / Wxx-34	92.8	16.1	5.76
B	W10 / Wxx-30	92.2	14.5	6.38
C	W10 / Wxx-27	91.7	13.3	7.00
D	W10 / Wxx-24	91.0	12.1	7.61
E	W10 / Wxx-35	93.0	16.5	5.62
F	W10 / Wxx-35	93.0	16.5	5.62

SCOP DATA EN 14825:2018	
Source - Water [10°C] / Low Temperature [35°C]	
SCOPon	6.52
SCOPnet	6.52
SCOP	6.51
η [%]	260.52
Label	A+++
Qh [kWh]	29457
Pdesignh [kW]	93.0
Tbivalent [°C]	-10.00

Source - Water [10°C] / Medium Temperature [55°C]

	Operating conditions	Qh	P	COP
1	W10 / W47-55	94.8	27.5	3.44
2	W10 / W47-55 (MIN)	47.4	13.6	3.49
A	W10 / Wxx-52	95.4	24.9	3.84
B	W10 / Wxx-42	94.5	18.8	5.03
C	W10 / Wxx-36	93.9	16.3	5.85
D	W10 / Wxx-30	93.3	14.4	6.56
E	W10 / Wxx-55	94.8	27.5	3.44
F	W10 / Wxx-55	94.8	27.5	3.44

SCOP DATA EN 14825:2018	
Source - Water [10°C] / Medium Temperature [55°C]	
SCOPon	4.91
SCOPnet	4.91
SCOP	4.90
η [%]	196.17
Label	A+++
Qh [kWh]	39889
Pdesignh [kW]	94.8
Tbivalent [°C]	-10.00

Low temperature cooling W 12 / 7°C

	Operating conditions	Qc	P	EER
A	W30-35 / W12-7	57.1	18.0	3.18
B	W26-xx / W12-7	58.1	16.4	3.53
C	W22-xx / W12-7	58.8	15.0	3.92
D	W18-xx / W12-7	59.1	14.3	4.13

SEER DATA EN 14825:2018 [W 12 / 7°C]	
SEERon	3.80
SEER	3.80
Qc [kWh]	33420
η [%]	151.96


Radiant cooling W 23 / 18°C

	Operating conditions	Qc	P	EER
A	W50-xx / W23-18	67.3	29.1	2.31
B	W40-xx / W23-18	72.7	22.7	3.20
C	W30-35 / W23-18	76.6	18.0	4.26
D	W26-xx / W23-18	77.8	16.4	4.73

SEER DATA EN 14825:2018 [W 23 / 18°C]	
SEERon	5.09
SEER	5.09
Qc [kWh]	33420
η [%]	203.47


Performance lines - heating

- Qh-nom-35 - - - Qh-min-35 - - - - Qh-max-65 — Qh-nom-45 — Qh-nom-55
- Qh-nom-65

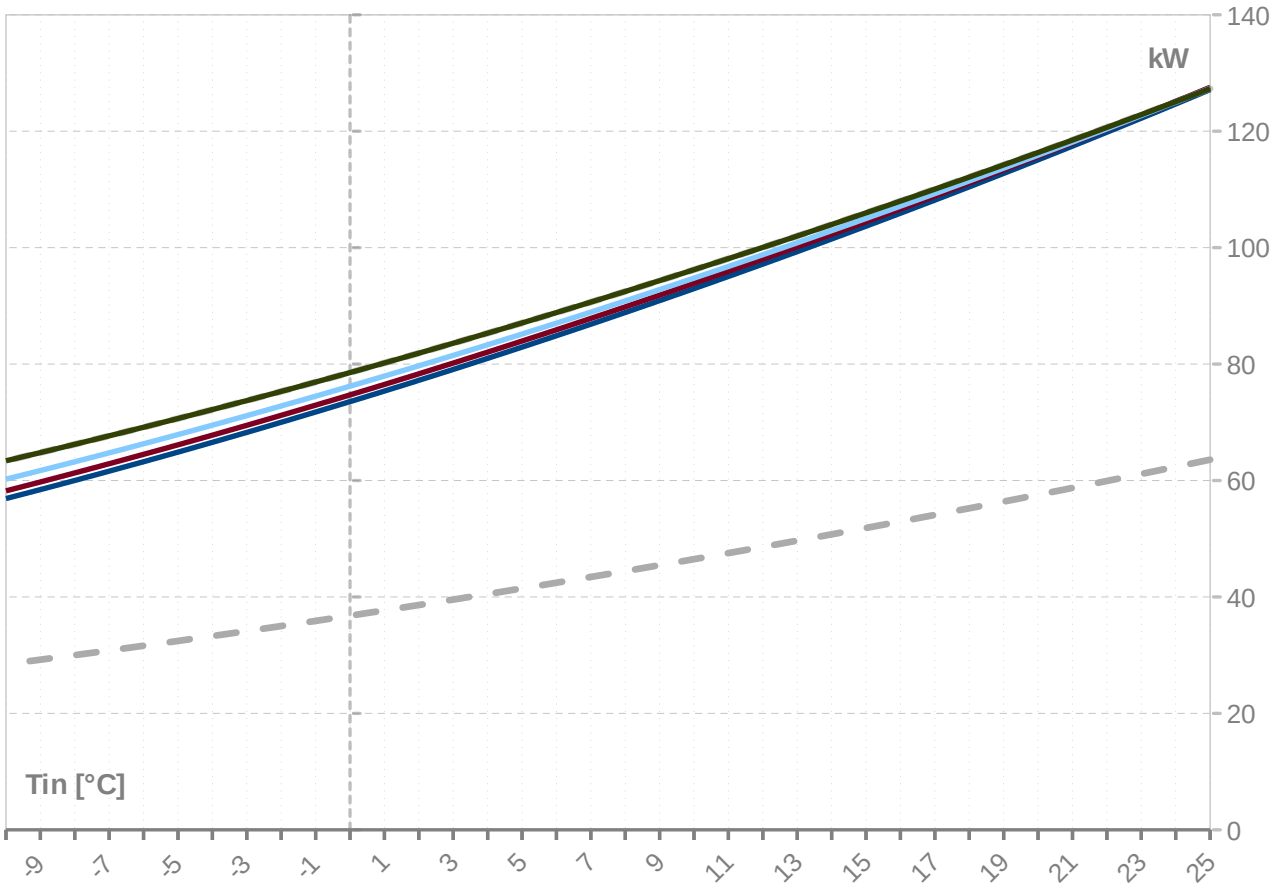

Performance lines - cooling

- Qc-nom-12-7 — Qc-nom-23-18

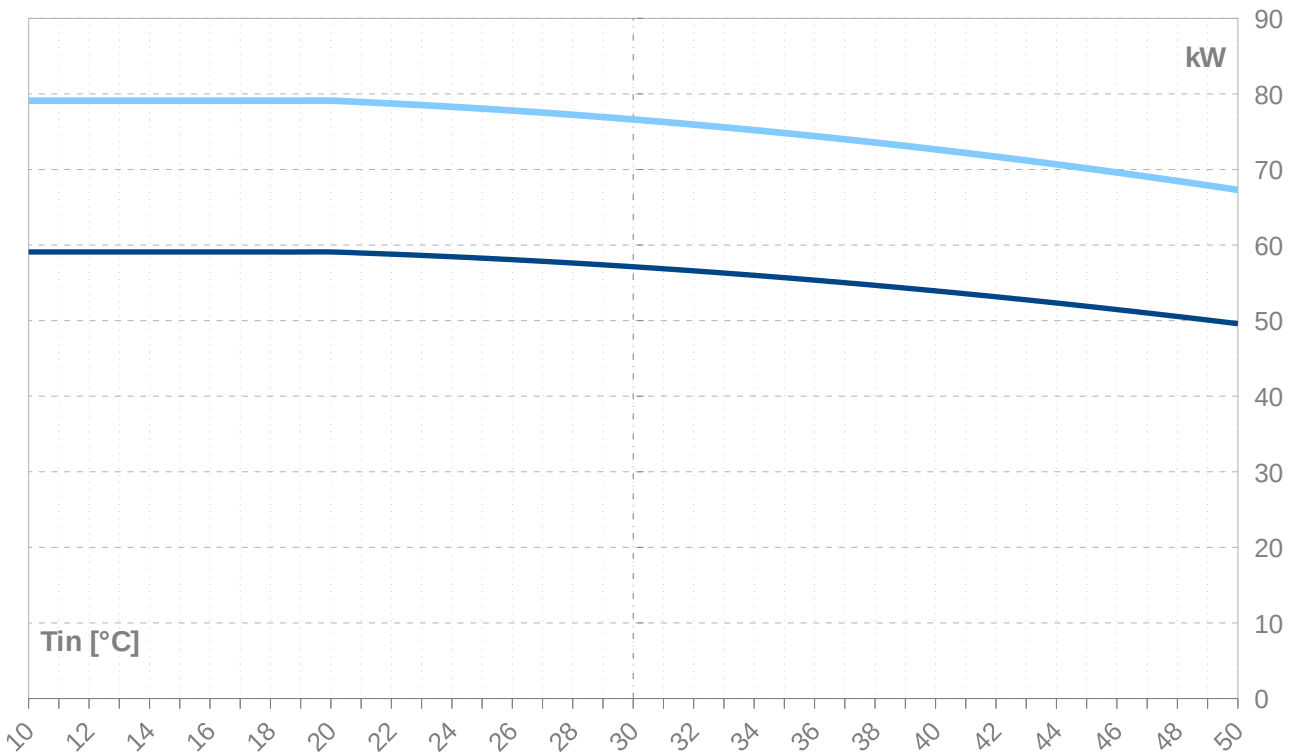

Th -OU		35										
Ts -IN	Qh nom	Qh min	Qh max	Pin nom	Pin min	Pin max	COP nom	Qc nom	Qc min	Qc max	I nom	
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kw / kw	[kW]	[kW]	[kW]	[A]	
25	127.1	63.6	127.1	14.6	7.2	14.6	8.70	113.5	56.7	113.5	40.1	
24	124.7	62.3	124.7	14.8	7.3	14.8	8.42	110.8	55.4	110.8	40.3	
23	122.2	61.1	122.2	15.0	7.4	15.0	8.14	108.2	54.1	108.2	40.4	
22	119.8	59.9	119.8	15.2	7.5	15.2	7.89	105.6	52.8	105.6	40.6	
21	117.4	58.7	117.4	15.4	7.6	15.4	7.65	103.1	51.6	103.1	40.8	
20	115.1	57.5	115.1	15.5	7.7	15.5	7.42	100.6	50.3	100.6	40.9	
19	112.8	56.4	112.8	15.7	7.7	15.7	7.20	98.1	49.1	98.1	41.1	
18	110.4	55.2	110.4	15.8	7.8	15.8	6.99	95.7	47.8	95.7	41.2	
17	108.2	54.1	108.2	15.9	7.9	15.9	6.79	93.3	46.6	93.3	41.3	
16	105.9	53.0	105.9	16.0	7.9	16.0	6.60	90.9	45.5	90.9	41.5	
15	103.7	51.8	103.7	16.1	8.0	16.1	6.42	88.6	44.3	88.6	41.6	
14	101.5	50.7	101.5	16.2	8.0	16.2	6.25	86.3	43.2	86.3	41.7	
13	99.3	49.7	99.3	16.3	8.1	16.3	6.08	84.1	42.0	84.1	41.8	
12	97.2	48.6	97.2	16.4	8.1	16.4	5.92	81.9	40.9	81.9	41.9	
11	95.1	47.5	95.1	16.5	8.1	16.5	5.77	79.7	39.8	79.7	41.9	
10	93.0	46.5	93.0	16.5	8.2	16.5	5.62	77.5	38.8	77.5	42.0	
9	90.9	45.5	90.9	16.6	8.2	16.6	5.48	75.4	37.7	75.4	42.1	
8	88.9	44.4	88.9	16.6	8.2	16.6	5.34	73.3	36.7	73.3	42.1	
7	86.9	43.4	86.9	16.7	8.2	16.7	5.21	71.3	35.6	71.3	42.2	
6	84.9	42.4	84.9	16.7	8.2	16.7	5.08	69.3	34.6	69.3	42.2	
5	82.9	41.5	82.9	16.7	8.3	16.7	4.95	67.3	33.6	67.3	42.3	
4	81.0	40.5	81.0	16.8	8.3	16.8	4.83	65.3	32.7	65.3	42.3	
3	79.1	39.5	79.1	16.8	8.3	16.8	4.71	63.4	31.7	63.4	42.4	
2	77.2	38.6	77.2	16.8	8.3	16.8	4.60	61.5	30.8	61.5	42.4	
1	75.4	37.7	75.4	16.8	8.3	16.8	4.48	59.7	29.8	59.7	42.4	
0	73.6	36.8	73.6	16.8	8.3	16.8	4.38	57.9	28.9	57.9	42.4	
-1	71.8	35.9	71.8	16.8	8.3	16.8	4.27	56.1	28.0	56.1	42.4	
-2	70.0	35.0	70.0	16.8	8.3	16.8	4.16	54.3	27.1	54.3	42.4	
-3	68.3	34.1	68.3	16.8	8.3	16.8	4.06	52.6	26.3	52.6	42.4	
-4	66.6	33.3	66.6	16.8	8.3	16.8	3.96	50.9	25.4	50.9	42.5	
-5	64.9	32.4	64.9	16.8	8.3	16.8	3.86	49.2	24.6	49.2	42.4	
-6	63.2	31.6	63.2	16.8	8.3	16.8	3.77	47.5	23.8	47.5	42.4	
-7	61.6	30.8	61.6	16.8	8.3	16.8	3.67	45.9	23.0	45.9	42.4	
-8	60.0	30.0	60.0	16.8	8.3	16.8	3.58	44.3	22.2	44.3	42.4	
-9	58.4	29.2	58.4	16.8	8.3	16.8	3.49	42.8	21.4	42.8	42.4	
-10	56.9	28.4	56.9	16.7	8.3	16.7	3.40	41.3	20.6	41.3	42.4	
-11	55.4	27.7	55.4	16.7	8.3	16.7	3.31	39.8	19.9	39.8	42.4	
-12	53.9	26.9	53.9	16.7	8.2	16.7	3.22	38.3	19.1	38.3	42.4	
-13	52.4	26.2	52.4	16.7	8.2	16.7	3.14	36.8	18.4	36.8	42.3	
-14	51.0	25.5	51.0	16.7	8.2	16.7	3.05	35.4	17.7	35.4	42.3	
-15	49.6	24.8	49.6	16.7	8.2	16.7	2.97	34.0	17.0	34.0	42.3	

-- attention: operating limits not reflected in performance table

ZHI35K1P-TFD_R410A_2_BWW

Th -OU	45										
[°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]	Qc max [kW]	I nom [A]
25	127.5	63.8	127.5	20.2	10.0	20.2	6.31	108.7	54.3	108.7	44.9
24	125.1	62.6	125.1	20.3	10.0	20.3	6.16	106.1	53.1	106.1	45.0
23	122.7	61.4	122.7	20.4	10.1	20.4	6.00	103.6	51.8	103.6	45.1
22	120.3	60.2	120.3	20.5	10.1	20.5	5.86	101.2	50.6	101.2	45.2
21	118.0	59.0	118.0	20.6	10.2	20.6	5.72	98.7	49.4	98.7	45.3
20	115.7	57.8	115.7	20.7	10.2	20.7	5.59	96.3	48.2	96.3	45.3
19	113.4	56.7	113.4	20.8	10.2	20.8	5.46	94.0	47.0	94.0	45.4
18	111.1	55.6	111.1	20.8	10.3	20.8	5.33	91.6	45.8	91.6	45.4
17	108.9	54.4	108.9	20.9	10.3	20.9	5.21	89.4	44.7	89.4	45.5
16	106.6	53.3	106.6	20.9	10.3	20.9	5.09	87.1	43.5	87.1	45.5
15	104.5	52.2	104.5	21.0	10.3	21.0	4.98	84.9	42.4	84.9	45.5
14	102.3	51.1	102.3	21.0	10.4	21.0	4.87	82.7	41.3	82.7	45.6
13	100.1	50.1	100.1	21.0	10.4	21.0	4.76	80.5	40.3	80.5	45.6
12	98.0	49.0	98.0	21.0	10.4	21.0	4.66	78.4	39.2	78.4	45.6
11	95.9	48.0	95.9	21.1	10.4	21.1	4.56	76.3	38.1	76.3	45.6
10	93.9	46.9	93.9	21.1	10.4	21.1	4.46	74.2	37.1	74.2	45.6
9	91.8	45.9	91.8	21.1	10.4	21.1	4.36	72.2	36.1	72.2	45.6
8	89.8	44.9	89.8	21.1	10.4	21.1	4.27	70.2	35.1	70.2	45.6
7	87.8	43.9	87.8	21.1	10.4	21.1	4.17	68.2	34.1	68.2	45.6
6	85.9	42.9	85.9	21.0	10.4	21.0	4.08	66.2	33.1	66.2	45.6
5	84.0	42.0	84.0	21.0	10.4	21.0	3.99	64.3	32.2	64.3	45.6
4	82.1	41.0	82.1	21.0	10.4	21.0	3.91	62.4	31.2	62.4	45.6
3	80.2	40.1	80.2	21.0	10.3	21.0	3.82	60.6	30.3	60.6	45.5
2	78.3	39.2	78.3	21.0	10.3	21.0	3.74	58.8	29.4	58.8	45.5
1	76.5	38.3	76.5	20.9	10.3	20.9	3.66	57.0	28.5	57.0	45.5
0	74.7	37.4	74.7	20.9	10.3	20.9	3.57	55.2	27.6	55.2	45.4
-1	72.9	36.5	72.9	20.9	10.3	20.9	3.49	53.4	26.7	53.4	45.4
-2	71.2	35.6	71.2	20.8	10.3	20.8	3.42	51.7	25.9	51.7	45.4
-3	69.5	34.7	69.5	20.8	10.3	20.8	3.34	50.0	25.0	50.0	45.3
-4	67.8	33.9	67.8	20.8	10.2	20.8	3.26	48.4	24.2	48.4	45.3
-5	66.1	33.1	66.1	20.7	10.2	20.7	3.19	46.8	23.4	46.8	45.2
-6	64.5	32.2	64.5	20.7	10.2	20.7	3.11	45.1	22.6	45.1	45.2
-7	62.9	31.4	62.9	20.7	10.2	20.7	3.04	43.6	21.8	43.6	45.1
-8	61.3	30.6	61.3	20.7	10.2	20.7	2.97	42.0	21.0	42.0	45.1
-9	59.7	29.9	59.7	20.6	10.2	20.6	2.90	40.5	20.2	40.5	45.1
-10	58.2	29.1	58.2	20.6	10.2	20.6	2.83	39.0	19.5	39.0	45.0
-11	56.7	28.4	56.7	20.6	10.1	20.6	2.76	37.5	18.7	37.5	45.0
-12	55.2	27.6	55.2	20.6	10.1	20.6	2.69	36.0	18.0	36.0	44.9
-13	53.8	26.9	53.8	20.5	10.1	20.5	2.62	34.6	17.3	34.6	44.9
-14	52.4	26.2	52.4	20.5	10.1	20.5	2.55	33.2	16.6	33.2	44.8
-15	51.0	25.5	51.0	20.5	10.1	20.5	2.48	31.8	15.9	31.8	44.8

-- attention: operating limits not reflected in performance table

Th -OU		55										
Ts -IN	Qh nom	Qh min	Qh max	Pin nom	Pin min	Pin max	COP nom	Qc nom	Qc min	Qc max	I nom	
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]	
25	127.4	63.7	127.4	27.7	13.7	27.7	4.59	101.5	50.7	101.5	52.0	
24	125.0	62.5	125.0	27.8	13.7	27.8	4.50	99.1	49.5	99.1	52.0	
23	122.7	61.3	122.7	27.8	13.7	27.8	4.41	96.7	48.4	96.7	52.0	
22	120.4	60.2	120.4	27.8	13.7	27.8	4.33	94.4	47.2	94.4	52.0	
21	118.1	59.1	118.1	27.8	13.7	27.8	4.24	92.1	46.1	92.1	52.0	
20	115.9	57.9	115.9	27.8	13.7	27.8	4.16	89.9	44.9	89.9	52.0	
19	113.7	56.8	113.7	27.8	13.7	27.8	4.08	87.7	43.8	87.7	52.0	
18	111.5	55.7	111.5	27.8	13.7	27.8	4.01	85.5	42.7	85.5	52.0	
17	109.3	54.6	109.3	27.8	13.7	27.8	3.93	83.3	41.7	83.3	51.9	
16	107.1	53.6	107.1	27.8	13.7	27.8	3.86	81.2	40.6	81.2	51.9	
15	105.0	52.5	105.0	27.8	13.7	27.8	3.78	79.1	39.5	79.1	51.9	
14	102.9	51.5	102.9	27.7	13.7	27.7	3.71	77.0	38.5	77.0	51.8	
13	100.8	50.4	100.8	27.7	13.7	27.7	3.64	75.0	37.5	75.0	51.8	
12	98.8	49.4	98.8	27.6	13.6	27.6	3.57	73.0	36.5	73.0	51.8	
11	96.8	48.4	96.8	27.6	13.6	27.6	3.51	71.0	35.5	71.0	51.7	
10	94.8	47.4	94.8	27.5	13.6	27.5	3.44	69.0	34.5	69.0	51.7	
9	92.8	46.4	92.8	27.5	13.6	27.5	3.37	67.1	33.6	67.1	51.6	
8	90.9	45.4	90.9	27.4	13.5	27.4	3.31	65.2	32.6	65.2	51.5	
7	88.9	44.5	88.9	27.4	13.5	27.4	3.25	63.4	31.7	63.4	51.5	
6	87.0	43.5	87.0	27.3	13.5	27.3	3.18	61.5	30.8	61.5	51.4	
5	85.2	42.6	85.2	27.3	13.5	27.3	3.12	59.7	29.8	59.7	51.3	
4	83.3	41.7	83.3	27.2	13.4	27.2	3.06	57.9	29.0	57.9	51.3	
3	81.5	40.8	81.5	27.2	13.4	27.2	3.00	56.1	28.1	56.1	51.2	
2	79.7	39.9	79.7	27.1	13.4	27.1	2.94	54.4	27.2	54.4	51.1	
1	77.9	39.0	77.9	27.0	13.3	27.0	2.88	52.7	26.3	52.7	51.1	
0	76.2	38.1	76.2	27.0	13.3	27.0	2.83	51.0	25.5	51.0	51.0	
-1	74.5	37.2	74.5	26.9	13.3	26.9	2.77	49.4	24.7	49.4	50.9	
-2	72.8	36.4	72.8	26.9	13.2	26.9	2.71	47.7	23.9	47.7	50.9	
-3	71.1	35.6	71.1	26.8	13.2	26.8	2.65	46.1	23.1	46.1	50.8	
-4	69.5	34.7	69.5	26.8	13.2	26.8	2.60	44.5	22.3	44.5	50.7	
-5	67.9	33.9	67.9	26.7	13.2	26.7	2.54	43.0	21.5	43.0	50.6	
-6	66.3	33.2	66.3	26.7	13.1	26.7	2.49	41.4	20.7	41.4	50.6	
-7	64.7	32.4	64.7	26.6	13.1	26.6	2.43	39.9	19.9	39.9	50.5	
-8	63.2	31.6	63.2	26.6	13.1	26.6	2.38	38.4	19.2	38.4	50.4	
-9	61.7	30.9	61.7	26.5	13.1	26.5	2.33	36.9	18.5	36.9	50.4	
-10	60.2	30.1	60.2	26.5	13.1	26.5	2.27	35.5	17.7	35.5	50.3	
-11	58.8	29.4	58.8	26.5	13.1	26.5	2.22	34.0	17.0	34.0	50.2	
-12	57.3	28.7	57.3	26.5	13.0	26.5	2.17	32.6	16.3	32.6	50.2	
-13	55.9	28.0	55.9	26.4	13.0	26.4	2.12	31.3	15.6	31.3	50.1	
-14	54.6	27.3	54.6	26.4	13.0	26.4	2.06	29.9	14.9	29.9	50.1	
-15	53.2	26.6	53.2	26.4	13.0	26.4	2.01	28.5	14.3	28.5	50.0	

-- attention: operating limits not reflected in performance table

Th -OU	[°C]	65 (T-max)									
		Ts -IN [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]
25	127.3	63.7	127.3	36.9	18.2	36.9	3.45	92.9	46.4	92.9	63.2
24	125.1	62.5	125.1	36.9	18.2	36.9	3.39	90.7	45.3	90.7	63.2
23	122.9	61.4	122.9	36.8	18.2	36.8	3.34	88.5	44.2	88.5	63.1
22	120.7	60.3	120.7	36.8	18.1	36.8	3.28	86.3	43.2	86.3	63.0
21	118.5	59.2	118.5	36.7	18.1	36.7	3.23	84.2	42.1	84.2	63.0
20	116.3	58.2	116.3	36.6	18.1	36.6	3.18	82.1	41.1	82.1	62.9
19	114.2	57.1	114.2	36.6	18.0	36.6	3.12	80.1	40.0	80.1	62.8
18	112.1	56.1	112.1	36.5	18.0	36.5	3.07	78.0	39.0	78.0	62.8
17	110.1	55.0	110.1	36.4	18.0	36.4	3.02	76.0	38.0	76.0	62.7
16	108.0	54.0	108.0	36.3	17.9	36.3	2.97	74.1	37.0	74.1	62.6
15	106.0	53.0	106.0	36.3	17.9	36.3	2.92	72.1	36.1	72.1	62.5
14	104.0	52.0	104.0	36.2	17.8	36.2	2.87	70.2	35.1	70.2	62.4
13	102.0	51.0	102.0	36.1	17.8	36.1	2.83	68.3	34.2	68.3	62.4
12	100.0	50.0	100.0	36.0	17.8	36.0	2.78	66.4	33.2	66.4	62.3
11	98.1	49.1	98.1	35.9	17.7	35.9	2.73	64.6	32.3	64.6	62.2
10	96.2	48.1	96.2	35.8	17.7	35.8	2.69	62.8	31.4	62.8	62.1
9	94.3	47.2	94.3	35.7	17.6	35.7	2.64	61.0	30.5	61.0	62.0
8	92.5	46.2	92.5	35.6	17.6	35.6	2.60	59.2	29.6	59.2	61.9
7	90.7	45.3	90.7	35.5	17.5	35.5	2.55	57.5	28.7	57.5	61.8
6	88.9	44.4	88.9	35.4	17.5	35.4	2.51	55.8	27.9	55.8	61.7
5	87.1	43.5	87.1	35.4	17.4	35.4	2.46	54.1	27.0	54.1	61.6
4	85.3	42.7	85.3	35.3	17.4	35.3	2.42	52.4	26.2	52.4	61.6
3	83.6	41.8	83.6	35.2	17.3	35.2	2.38	50.7	25.4	50.7	61.5
2	81.9	40.9	81.9	35.1	17.3	35.1	2.33	49.1	24.6	49.1	61.4
1	80.2	40.1	80.2	35.0	17.3	35.0	2.29	47.5	23.8	47.5	61.3
0	78.5	39.3	78.5	34.9	17.2	34.9	2.25	45.9	23.0	45.9	61.2
-1	76.9	38.5	76.9	34.9	17.2	34.9	2.21	44.4	22.2	44.4	61.1
-2	75.3	37.7	75.3	34.8	17.2	34.8	2.17	42.8	21.4	42.8	61.0
-3	73.7	36.9	73.7	34.7	17.1	34.7	2.12	41.3	20.7	41.3	60.9
-4	72.2	36.1	72.2	34.6	17.1	34.6	2.08	39.8	19.9	39.8	60.9
-5	70.6	35.3	70.6	34.6	17.1	34.6	2.04	38.3	19.2	38.3	60.8
-6	69.1	34.6	69.1	34.5	17.0	34.5	2.00	36.9	18.4	36.9	60.7
-7	67.7	33.8	67.7	34.5	17.0	34.5	1.96	35.5	17.7	35.5	60.6
-8	66.2	33.1	66.2	34.4	17.0	34.4	1.92	34.1	17.0	34.1	60.6
-9	64.8	32.4	64.8	34.4	17.0	34.4	1.88	32.7	16.3	32.7	60.5
-10	63.4	31.7	63.4	34.4	17.0	34.4	1.84	31.3	15.6	31.3	60.4
-11	62.0	31.0	62.0	34.4	16.9	34.4	1.81	29.9	15.0	29.9	60.4
-12	60.7	30.3	60.7	34.3	16.9	34.3	1.77	28.6	14.3	28.6	60.3
-13	59.3	29.7	59.3	34.3	16.9	34.3	1.73	27.3	13.6	27.3	60.3
-14	58.0	29.0	58.0	34.3	16.9	34.3	1.69	26.0	13.0	26.0	60.2
-15	56.8	28.4	56.8	34.3	16.9	34.3	1.65	24.7	12.3	24.7	60.2

-- attention: operating limits not reflected in performance table

Tc -OU		W 12 / 7 °C									
Ts -IN	Qc nom	Qc min	Qc max	Pin nom	Pin min	Pin max	EER	Qh nom	Qh min	Qh max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
40	53.9	27.0	53.9	22.7	11.2	22.7	2.38	75.1	37.6	75.1	46.9
39	54.3	27.2	54.3	22.2	10.9	22.2	2.45	75.0	37.5	75.0	46.4
38	54.7	27.3	54.7	21.7	10.7	21.7	2.52	74.9	37.4	74.9	46.0
37	55.0	27.5	55.0	21.1	10.4	21.1	2.60	74.8	37.4	74.8	45.6
36	55.4	27.7	55.4	20.7	10.2	20.7	2.68	74.6	37.3	74.6	45.3
35	55.7	27.8	55.7	20.2	10.0	20.2	2.76	74.5	37.3	74.5	44.9
34	56.0	28.0	56.0	19.7	9.7	19.7	2.84	74.4	37.2	74.4	44.6
33	56.3	28.1	56.3	19.3	9.5	19.3	2.92	74.3	37.1	74.3	44.2
32	56.6	28.3	56.6	18.8	9.3	18.8	3.00	74.2	37.1	74.2	43.9
31	56.9	28.4	56.9	18.4	9.1	18.4	3.09	74.1	37.0	74.1	43.6
30	57.1	28.6	57.1	18.0	8.9	18.0	3.18	73.9	37.0	73.9	43.3
29	57.4	28.7	57.4	17.6	8.7	17.6	3.26	73.8	36.9	73.8	43.0
28	57.6	28.8	57.6	17.2	8.5	17.2	3.35	73.7	36.8	73.7	42.7
27	57.9	28.9	57.9	16.8	8.3	16.8	3.44	73.6	36.8	73.6	42.4
26	58.1	29.0	58.1	16.4	8.1	16.4	3.53	73.4	36.7	73.4	42.1
25	58.3	29.1	58.3	16.1	7.9	16.1	3.63	73.3	36.6	73.3	41.8
24	58.5	29.2	58.5	15.7	7.7	15.7	3.72	73.1	36.6	73.1	41.5
23	58.6	29.3	58.6	15.4	7.6	15.4	3.82	73.0	36.5	73.0	41.2
22	58.8	29.4	58.8	15.0	7.4	15.0	3.92	72.8	36.4	72.8	40.8
21	58.9	29.5	58.9	14.7	7.2	14.7	4.02	72.6	36.3	72.6	40.4
20	59.1	29.5	59.1	14.3	7.1	14.3	4.13	72.5	36.2	72.5	40.0



Tc [°C]		W 23 / 18 °C									
0	Qc nom	Qc min	Qc max	Pin nom	Pin min	Pin max	EER	Qh nom	Qh min	Qh max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
40	72.7	36.3	72.7	22.7	11.2	22.7	3.20	94.2	47.1	95.1	47.3
39	73.1	36.6	73.1	22.2	10.9	22.2	3.30	94.1	47.0	95.0	46.8
38	73.6	36.8	73.6	21.7	10.7	21.7	3.40	94.0	47.0	94.9	46.3
37	74.0	37.0	74.0	21.1	10.4	21.1	3.50	93.9	47.0	94.8	45.8
36	74.4	37.2	74.4	20.7	10.2	20.7	3.60	93.8	46.9	94.7	45.4
35	74.8	37.4	74.8	20.2	10.0	20.2	3.71	93.8	46.9	94.6	45.0
34	75.2	37.6	75.2	19.7	9.7	19.7	3.81	93.7	46.8	94.5	44.6
33	75.6	37.8	75.6	19.3	9.5	19.3	3.92	93.6	46.8	94.4	44.2
32	75.9	38.0	75.9	18.8	9.3	18.8	4.03	93.5	46.7	94.3	43.8
31	76.3	38.1	76.3	18.4	9.1	18.4	4.14	93.4	46.7	94.2	43.5
30	76.6	38.3	76.6	18.0	8.9	18.0	4.26	93.3	46.7	94.2	43.1
29	76.9	38.5	76.9	17.6	8.7	17.6	4.37	93.2	46.6	94.1	42.7
28	77.2	38.6	77.2	17.2	8.5	17.2	4.49	93.1	46.5	94.0	42.4
27	77.5	38.8	77.5	16.8	8.3	16.8	4.61	93.0	46.5	93.9	42.0
26	77.8	38.9	77.8	16.4	8.1	16.4	4.73	92.8	46.4	93.8	41.6
25	78.1	39.0	78.1	16.1	7.9	16.1	4.86	92.7	46.4	93.8	41.2
24	78.3	39.1	78.3	15.7	7.7	15.7	4.99	92.6	46.3	93.7	40.9
23	78.5	39.3	78.5	15.4	7.6	15.4	5.11	92.4	46.2	93.6	40.4
22	78.7	39.4	78.7	15.0	7.4	15.0	5.25	92.2	46.1	93.5	40.0
21	78.9	39.5	78.9	14.7	7.2	14.7	5.38	92.1	46.0	93.4	39.6
20	79.1	39.6	79.1	14.3	7.1	14.3	5.52	91.9	45.9	93.3	39.1






-- attention: operating limits not reflected in performance table

LEGEND:


Ts-IN: Temperature renewable source - inlet [°C]
Th-OU: Temperature heating - outlet (flow) [°C]
Tc-OU: Temperature cooling - outlet (flow) [°C]
Qh nom: Heating capacity nominal
Qh min: Heating capacity minimal
Qh max: Heating capacity maximal
Pin nom: Power input at nominal heating capacity
Pin min: Power input at minimal heating capacity
Pin max: Power input at maximal heating capacity
COP nom: coefficient of performance at nominal heating capacity
Qc nom: cooling / heat extraction capacity at nominal heating capacity
Qc min: cooling / heat extraction at minimal heating capacity
Qc max: cooling / heat extraction at maximal heating capacity
I nom: Current at nominal heating capacity
EER: energy efficiency ratio at nominal cooling capacity


Operating limits

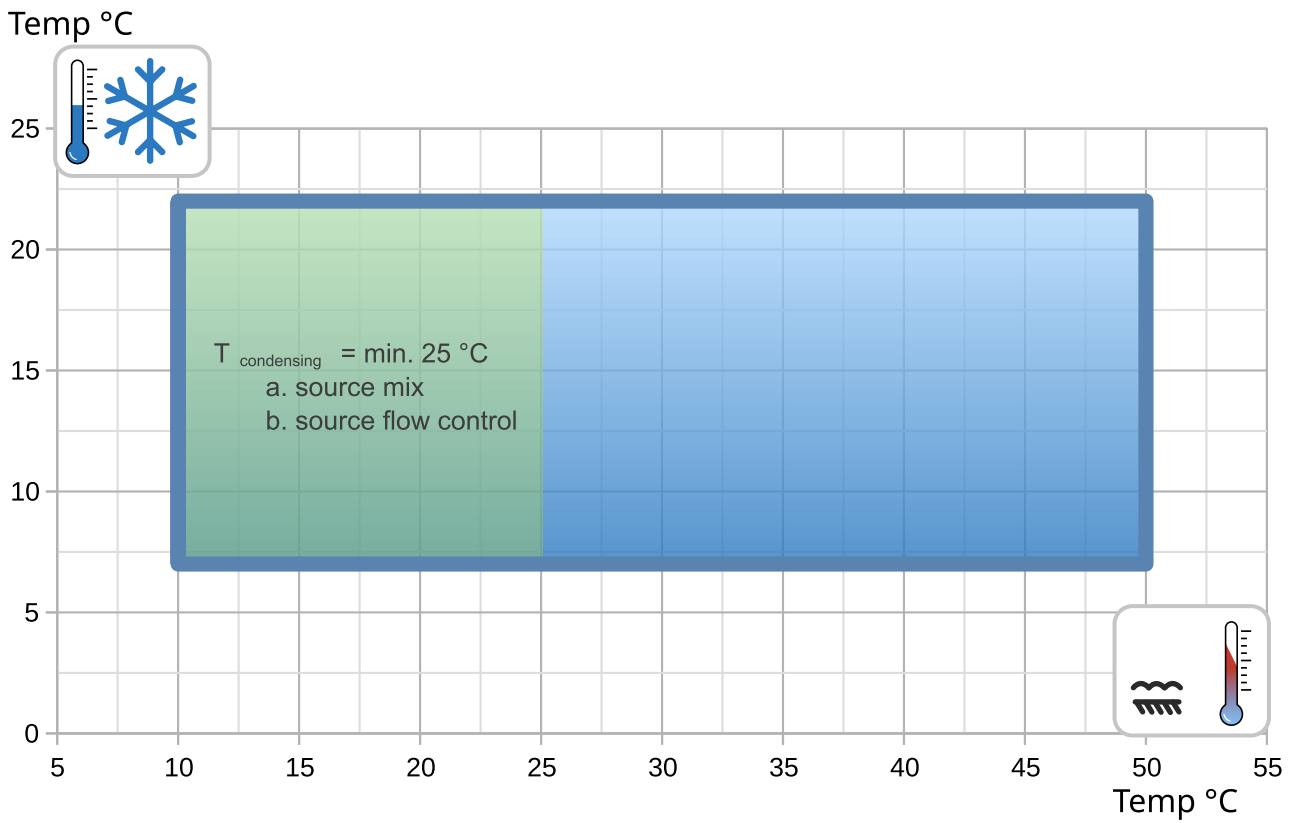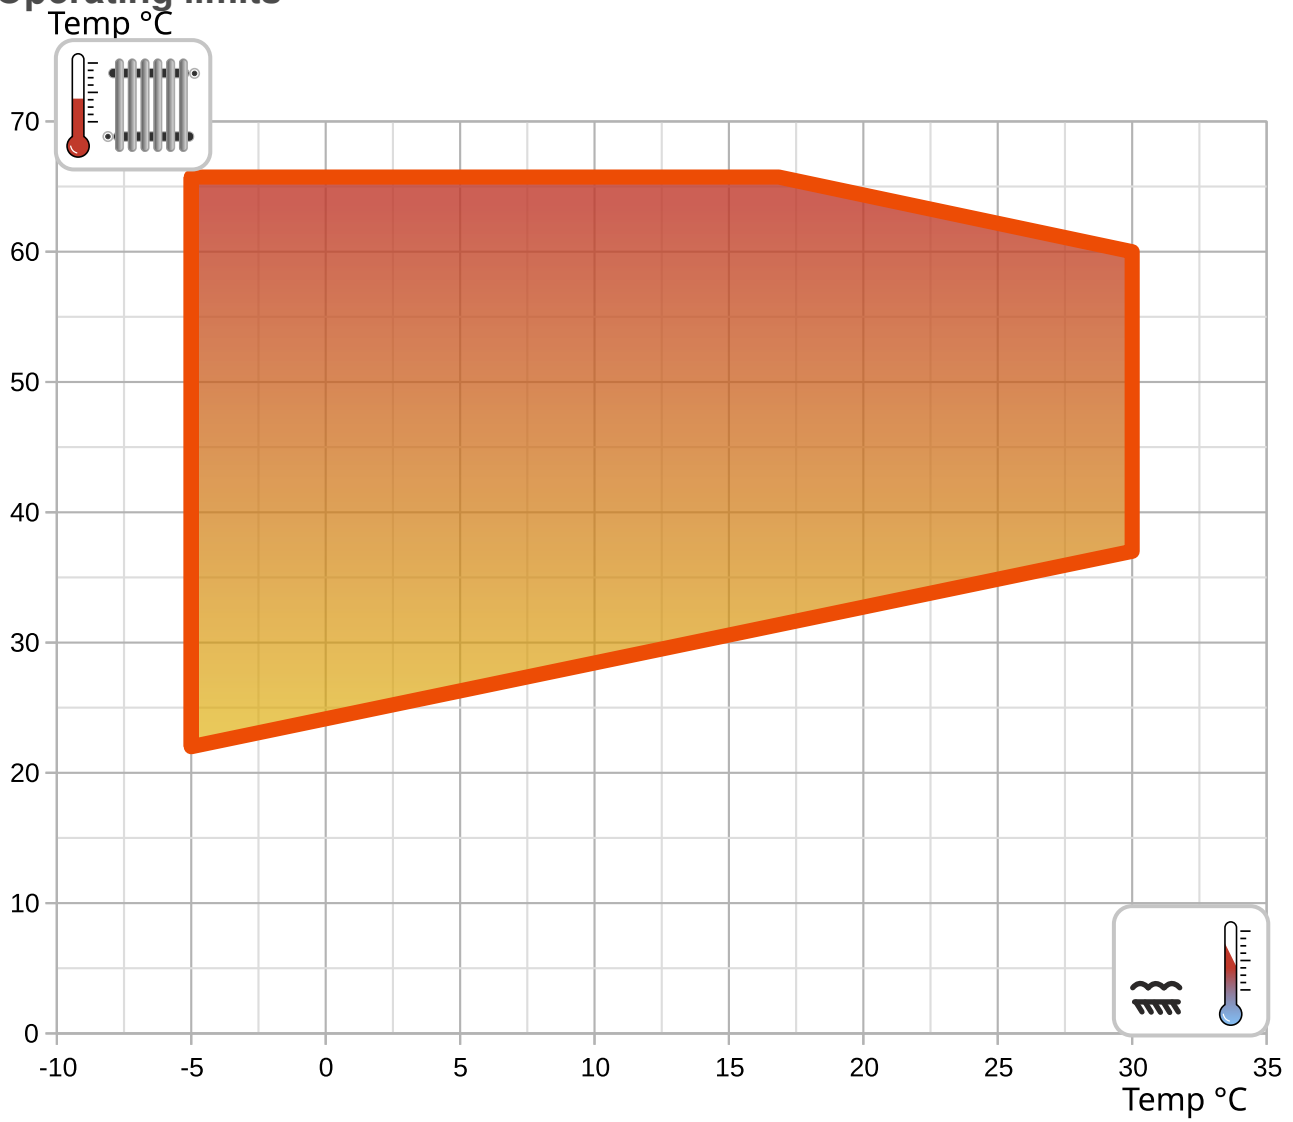


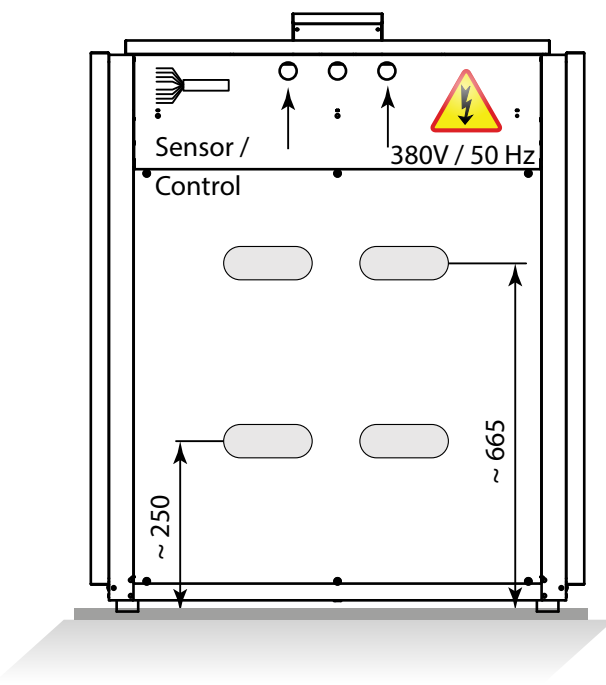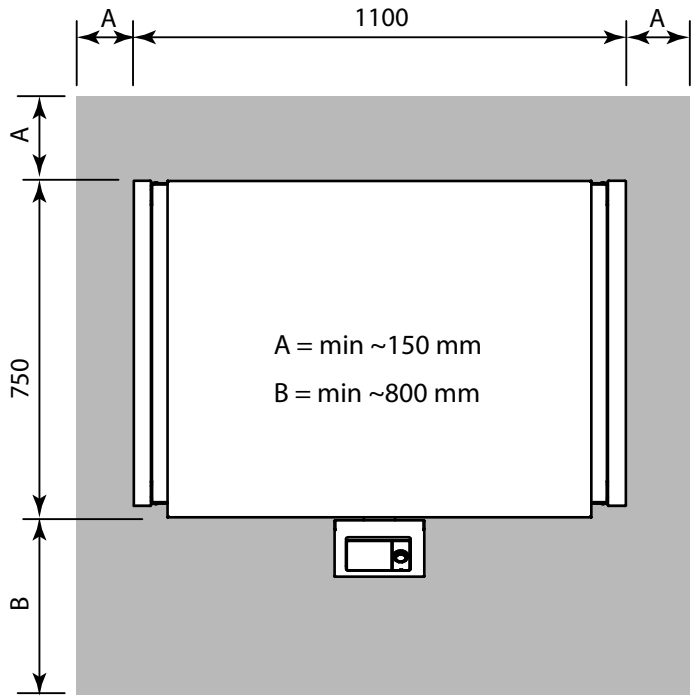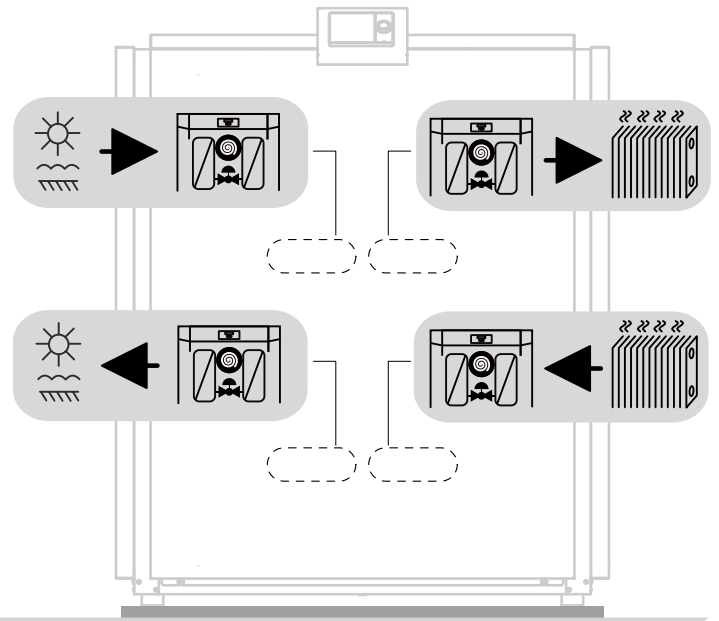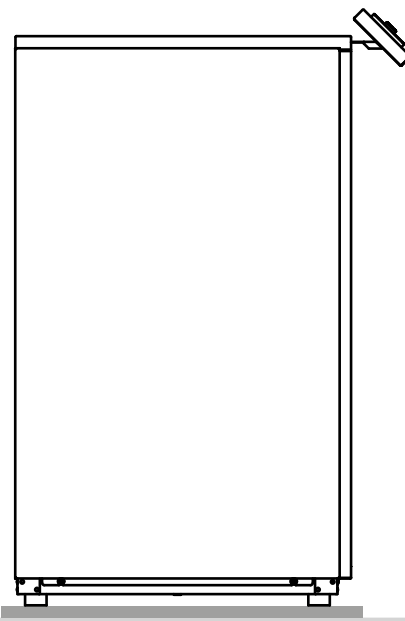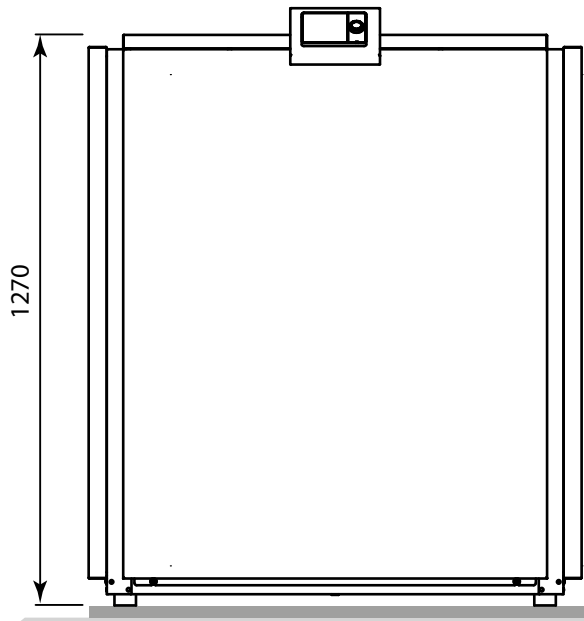


int. code: VN1100

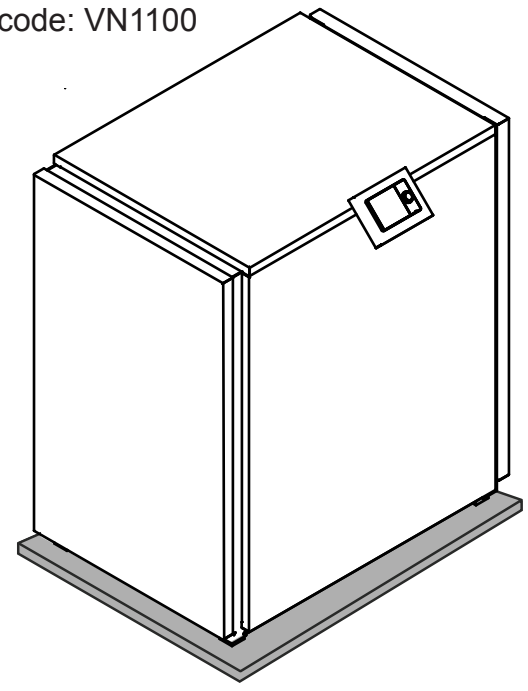

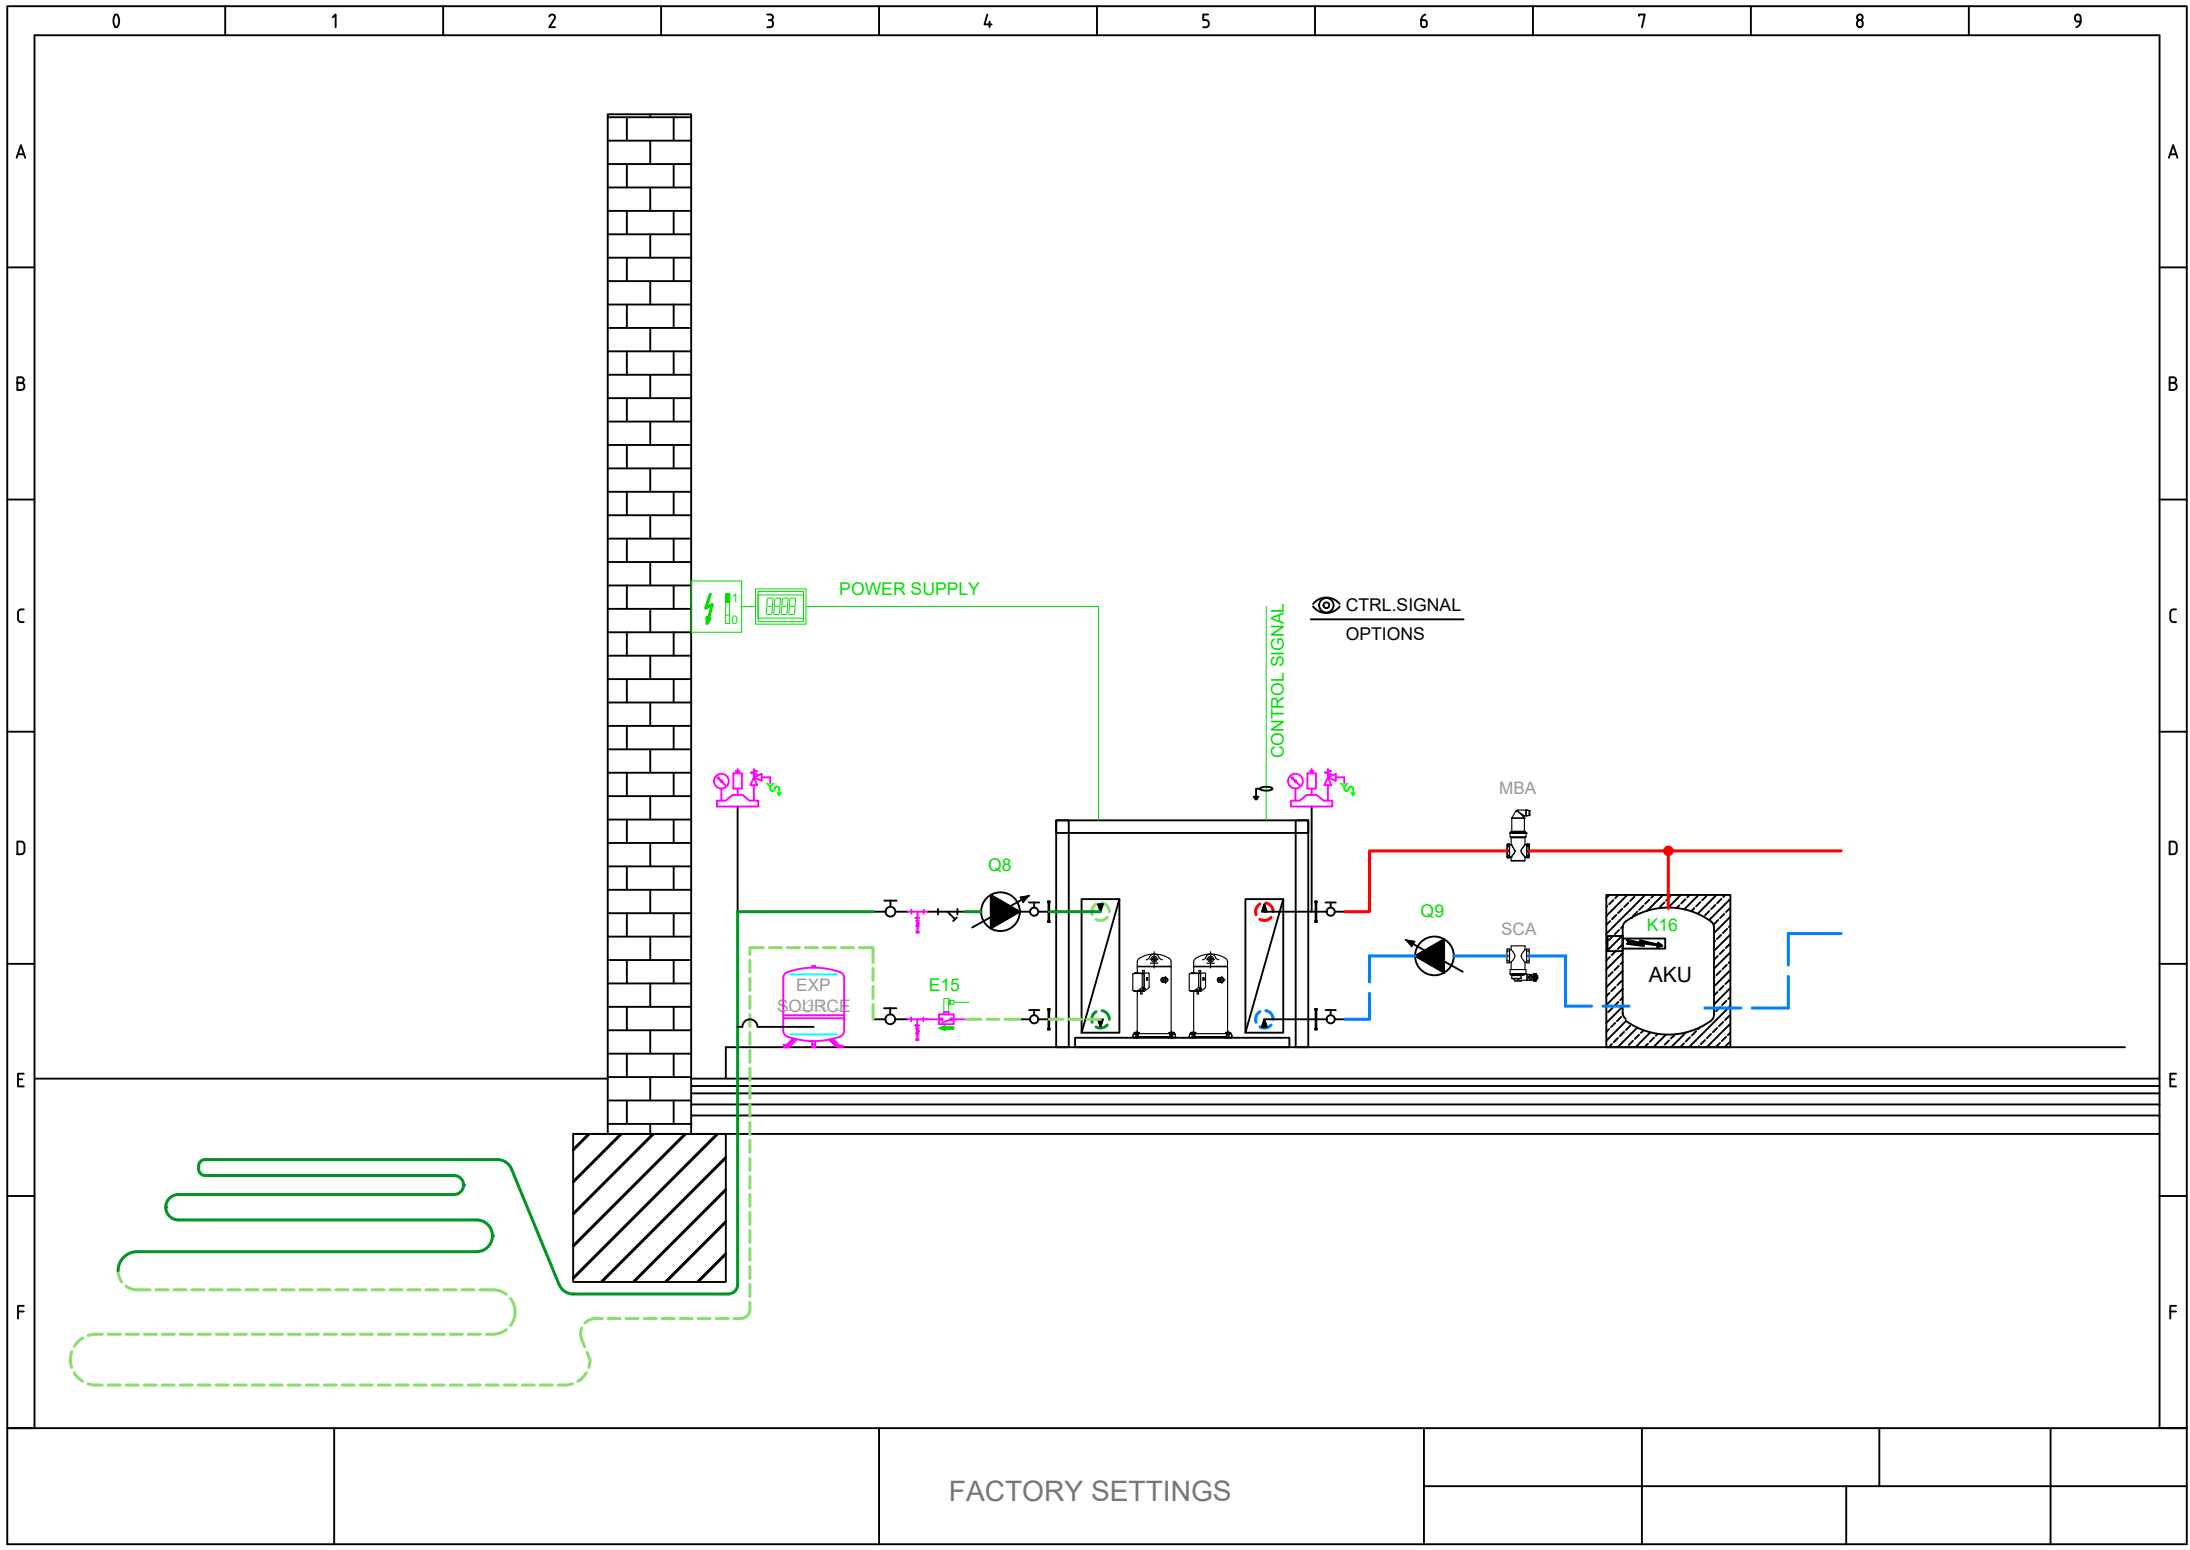

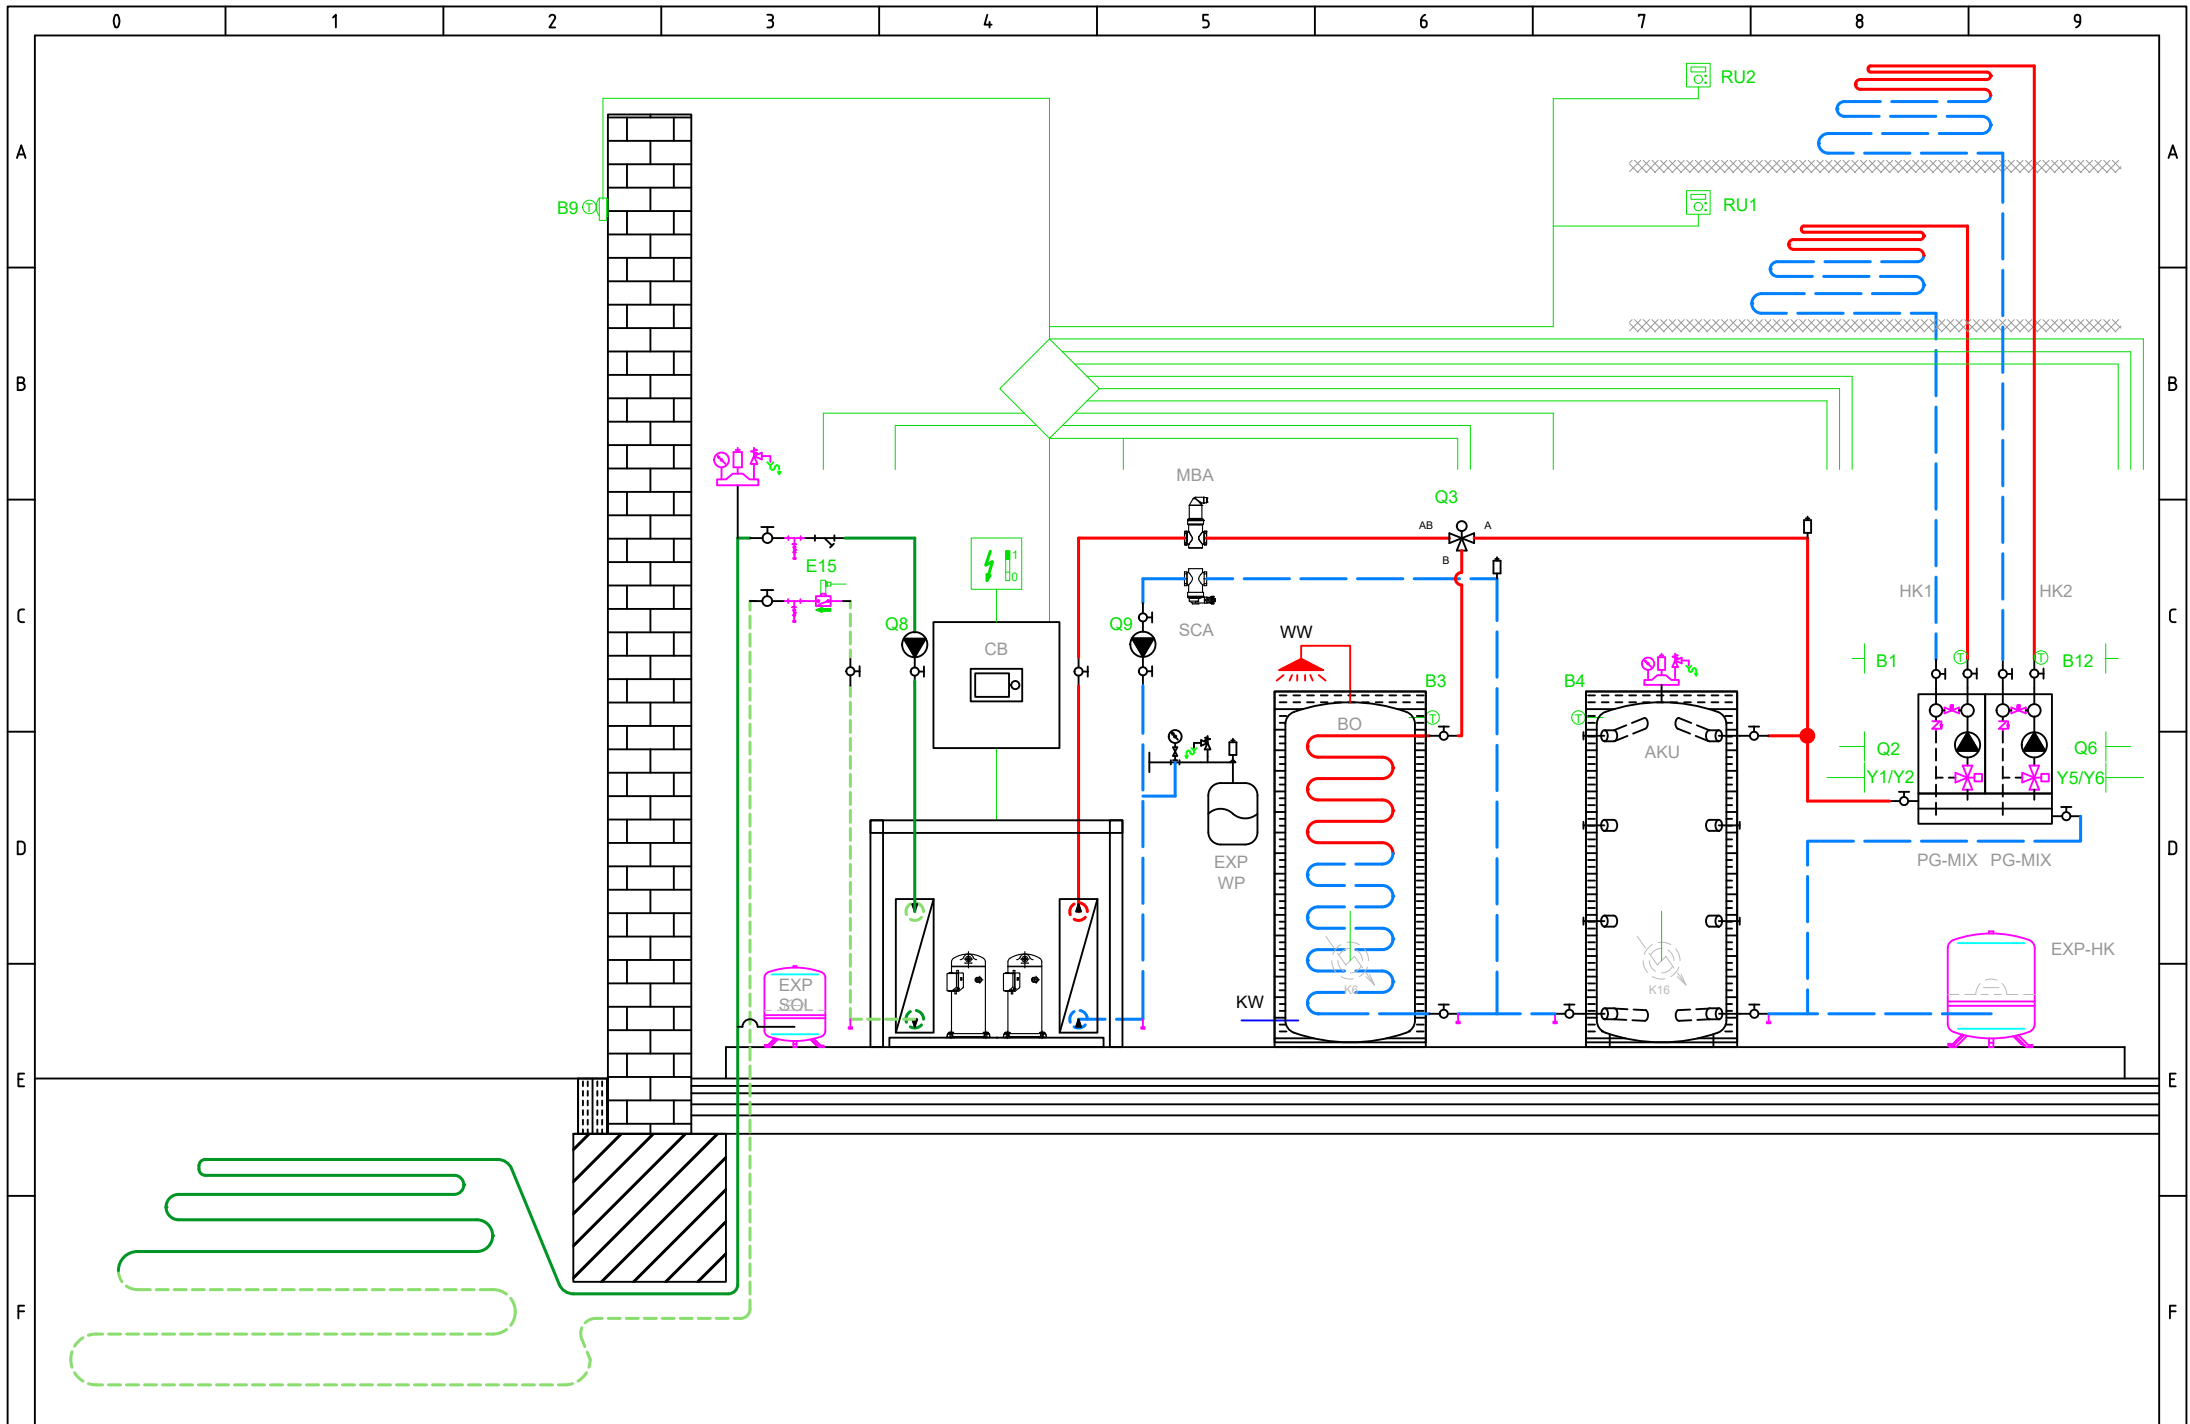

BASIC APPLICATION

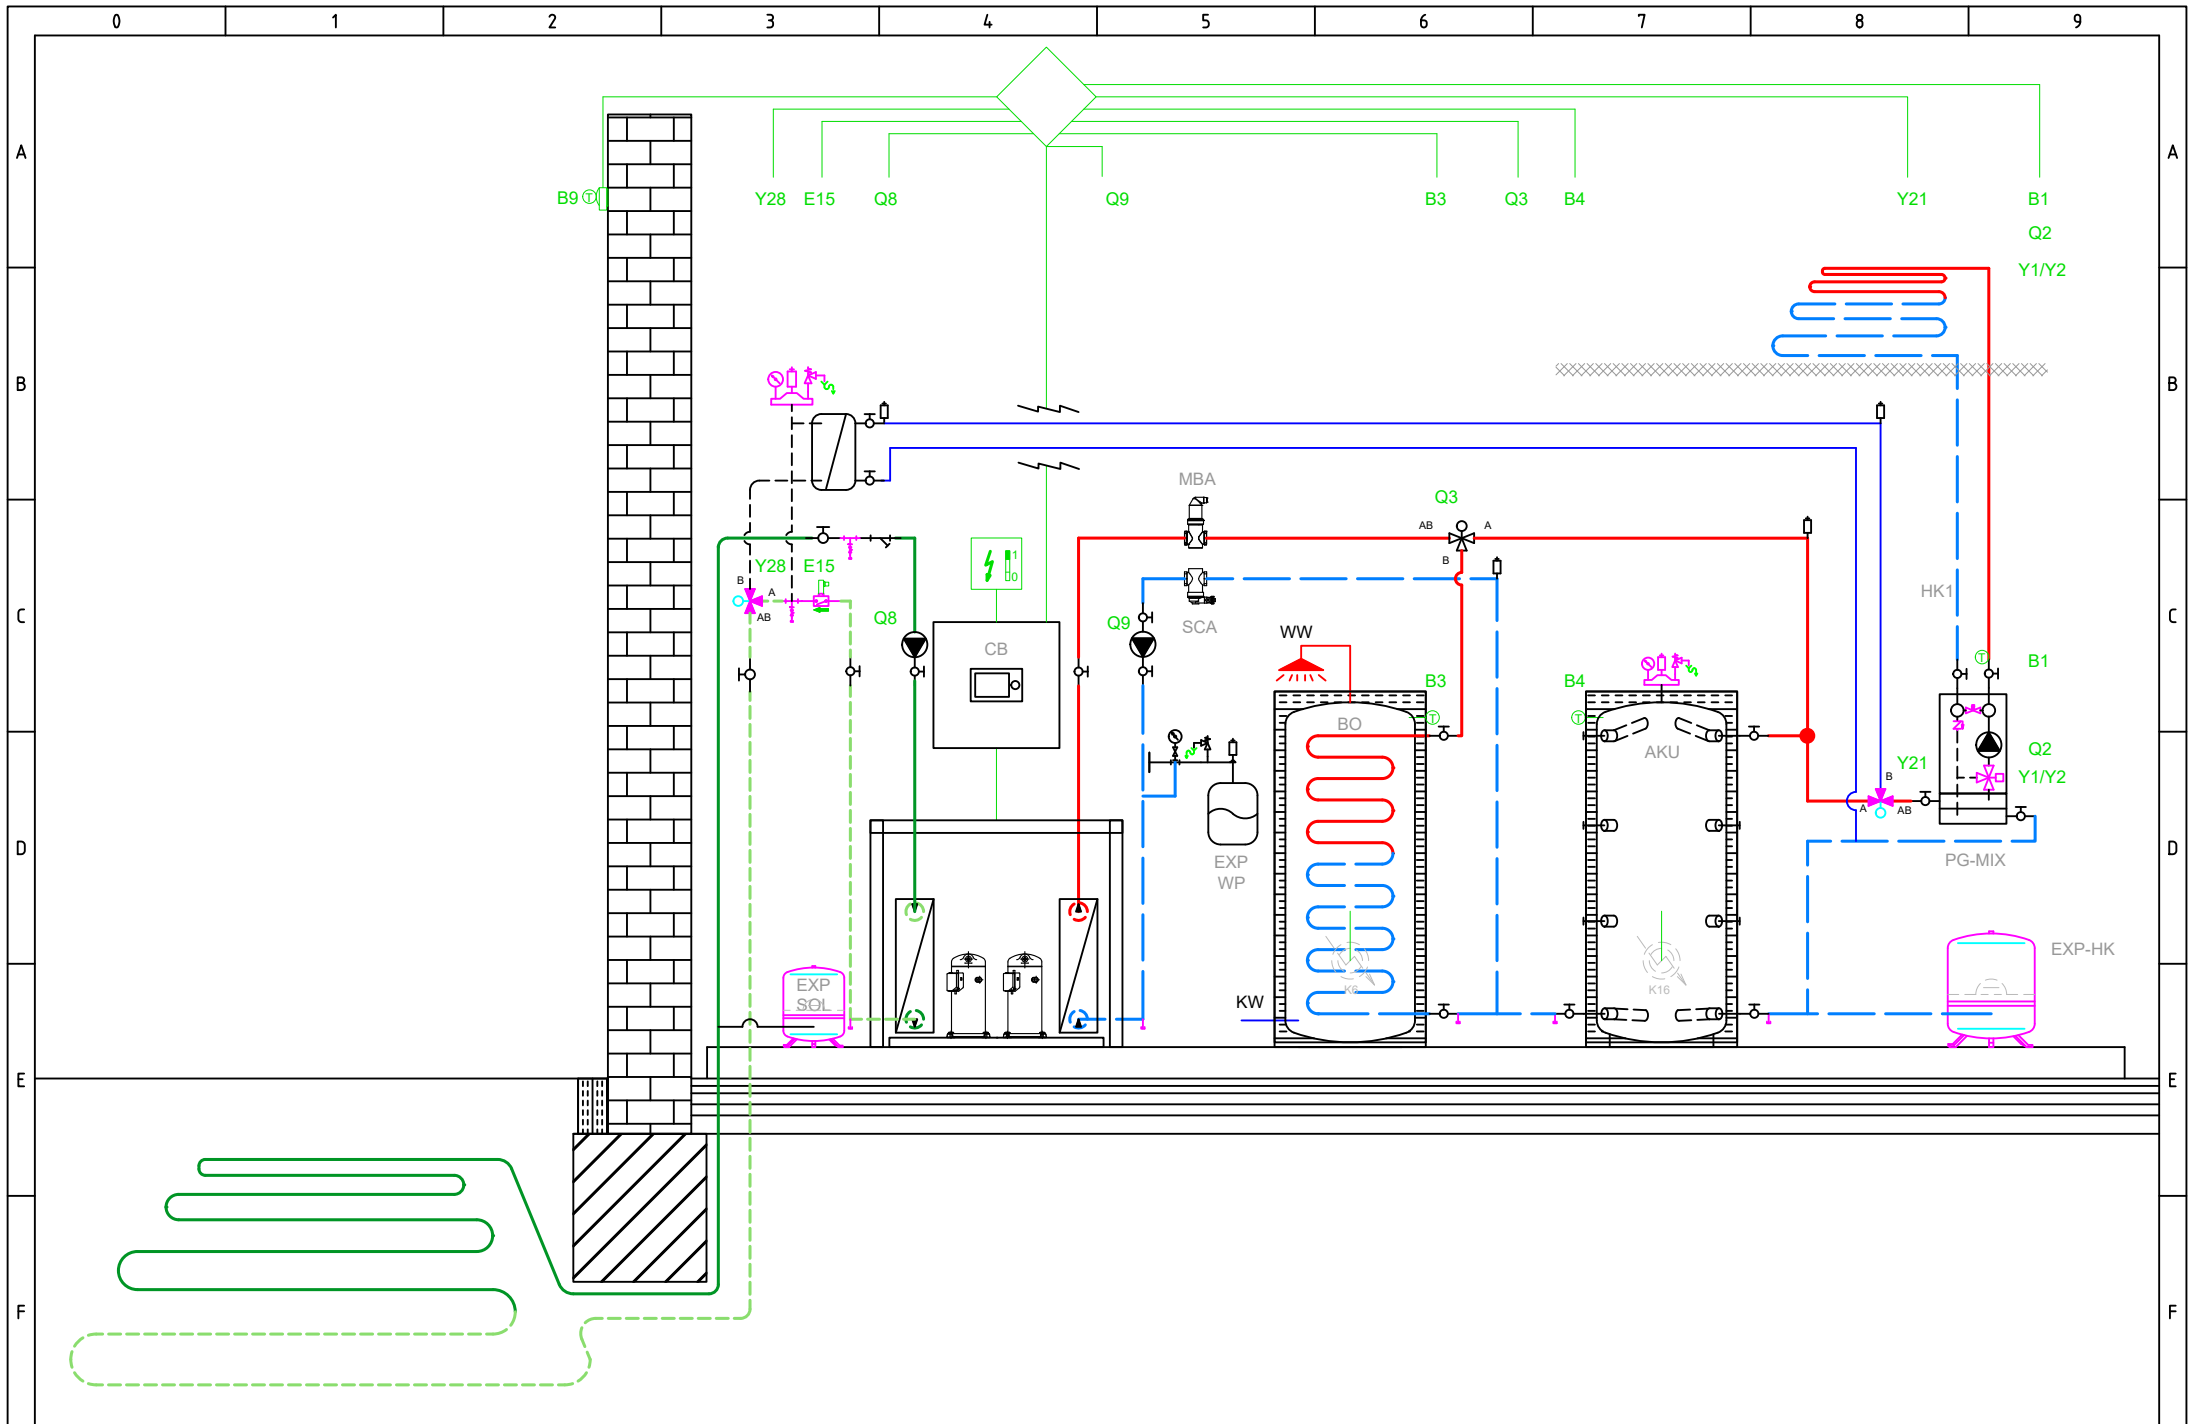

OPTIONAL APPLICATION

Total: max 6A
1 x QX...: max 2A

Main power supply 230V / 50 Hz
Ground
Neutral conductor

- E9 Low-pressure switch E9
- E10 High-pressure switch E10
- E15 Flow switch source E15
- E24 Flow switch consumers E24
- E6 Electrical utility lock E6
- E12 Overload compressor 2 E12
- E21 Mains supervision E21
- E22 Mains supervision E22
- E23 Mains supervision E23
- E11 Overload compressor 1 E11
- K1 Compressor stage 1 K1

Q8 Source pump Q8

Q9 Condenser pump Q9


K10 Alarm output K10

K40 Crankcase heater K40

K81 Valve evaporator K81

K82 Valve EVI K82


K2 Compressor stage 2 K2

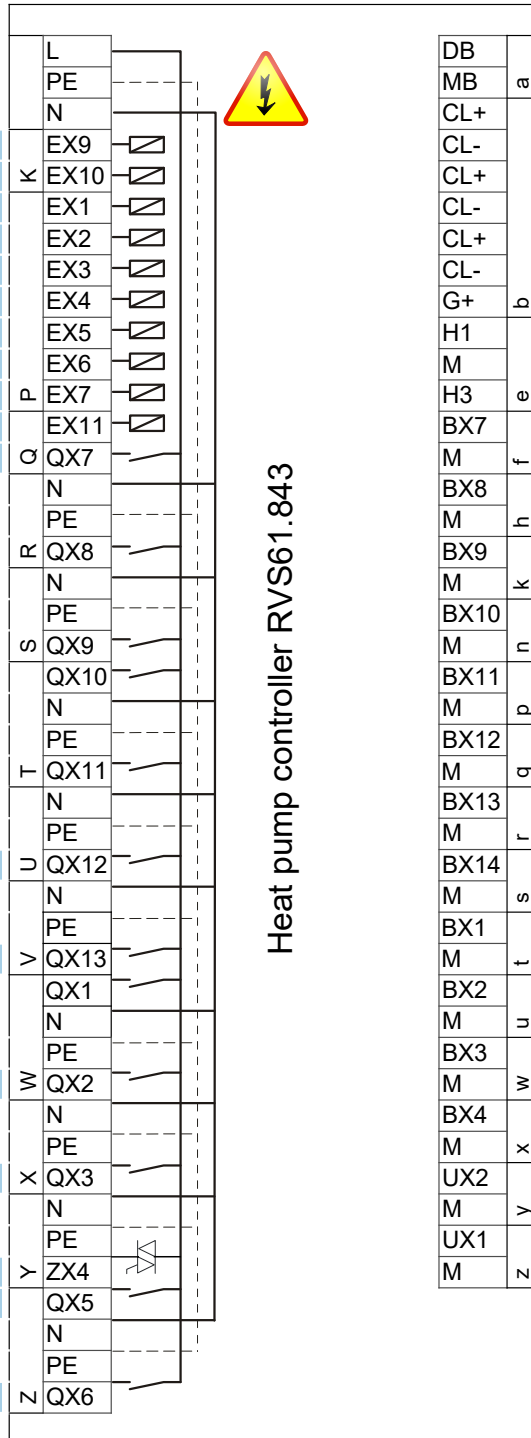

DB		LPB Bus data
MB	a	LPB Bus GND
CL+		Room unit QAA...
CL-		Room unit QAA...
CL+		Room unit QAA... 2.
CL-		Room unit QAA... 2.
CL+		Room unit QAA... 3.
CL-		Room unit QAA... 3.
G+	b	12V supply → OUT
H1		
M		
H3	e	Consumer request VK1
BX7		B81 Hot-gas sensor K1 B81
M	f	
BX8		
M	h	
BX9		
M	k	
BX10		B21 HP flow sensor B21
M	n	
BX11		
M	p	
BX12		B71 HP return sensor B71
M	q	
BX13		B91 Source inlet sensor B91
M	r	
BX14		B84 Source outl sens B92/B84
M	s	
BX1		
M	t	
BX2		
M	u	
BX3		B83 Refrig sensor liquid B83
M	w	
BX4		B82 Hot-gas sensor K2 B82
M	x	
UX2		Condenser pump Q9
M	y	0..10 V Signal
UX1		Source pump Q8
M	z	0..10 V Signal




- AVS75.390
- AVS75.391
- AVS75.370

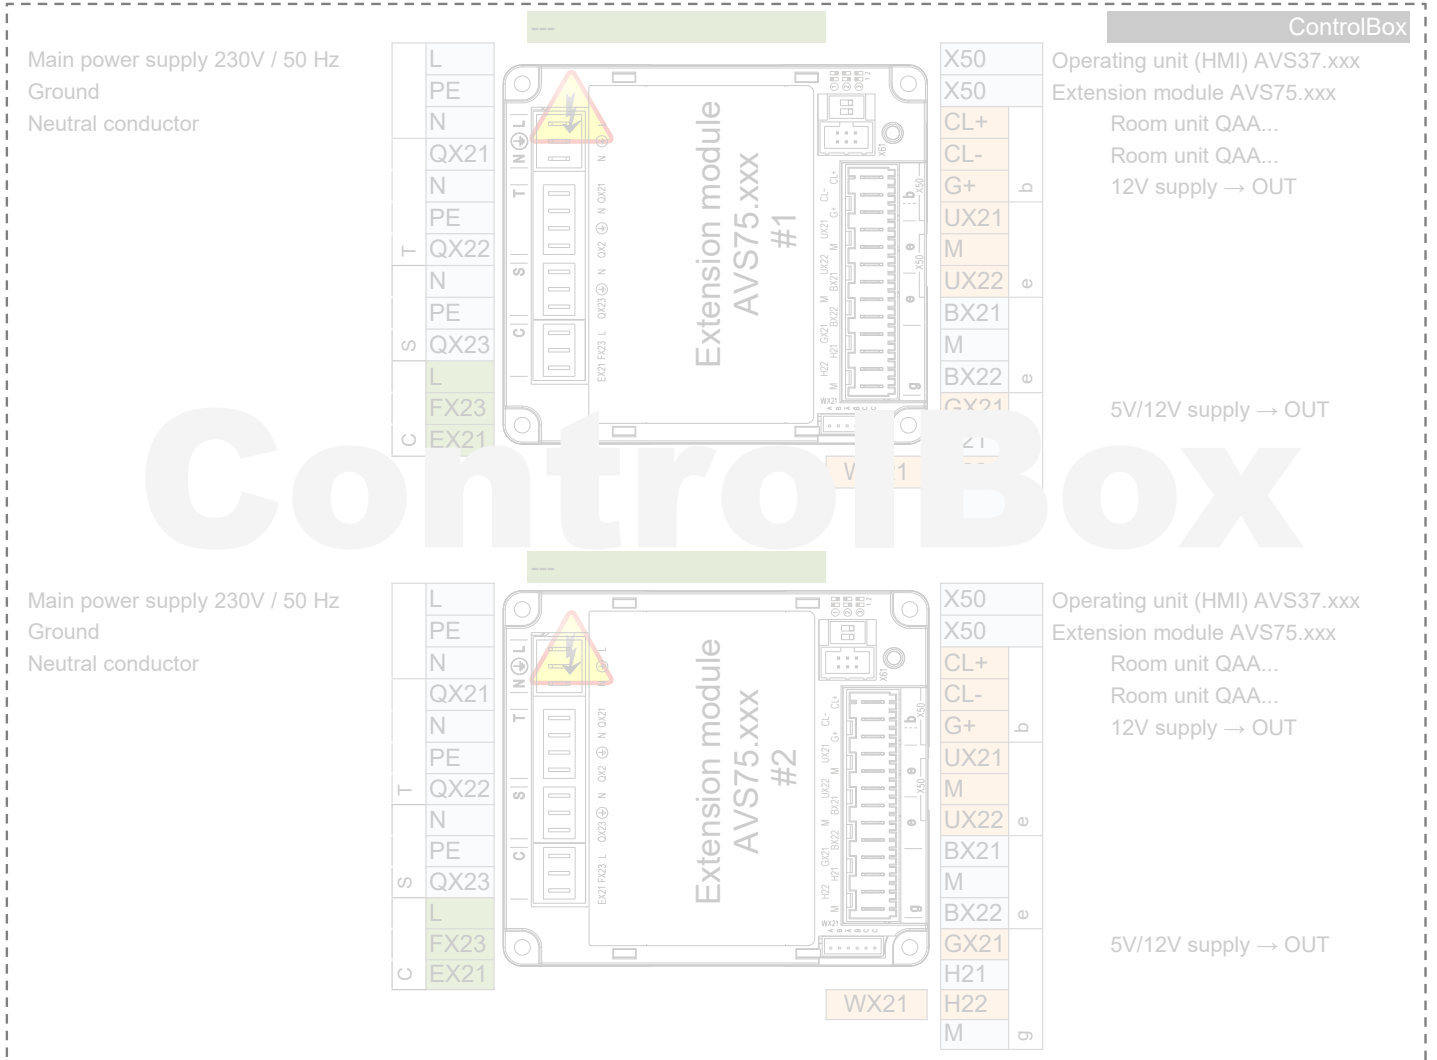

HEAT PUMP

EXTERNAL
INTERNAL

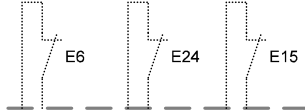

K1

K2

K82

K81

K40

K10

Q8 UX1

Q9 UX2

E11
KRW1
F1K
E11

E12
KRW2
F2K
E12


E6

Q9 ERR
F1S
E24

Q8.ERR
F1Z
E15

E10

E9





230V,50Hz max 6A

0...10V

230V,50Hz max 6A

0...10V

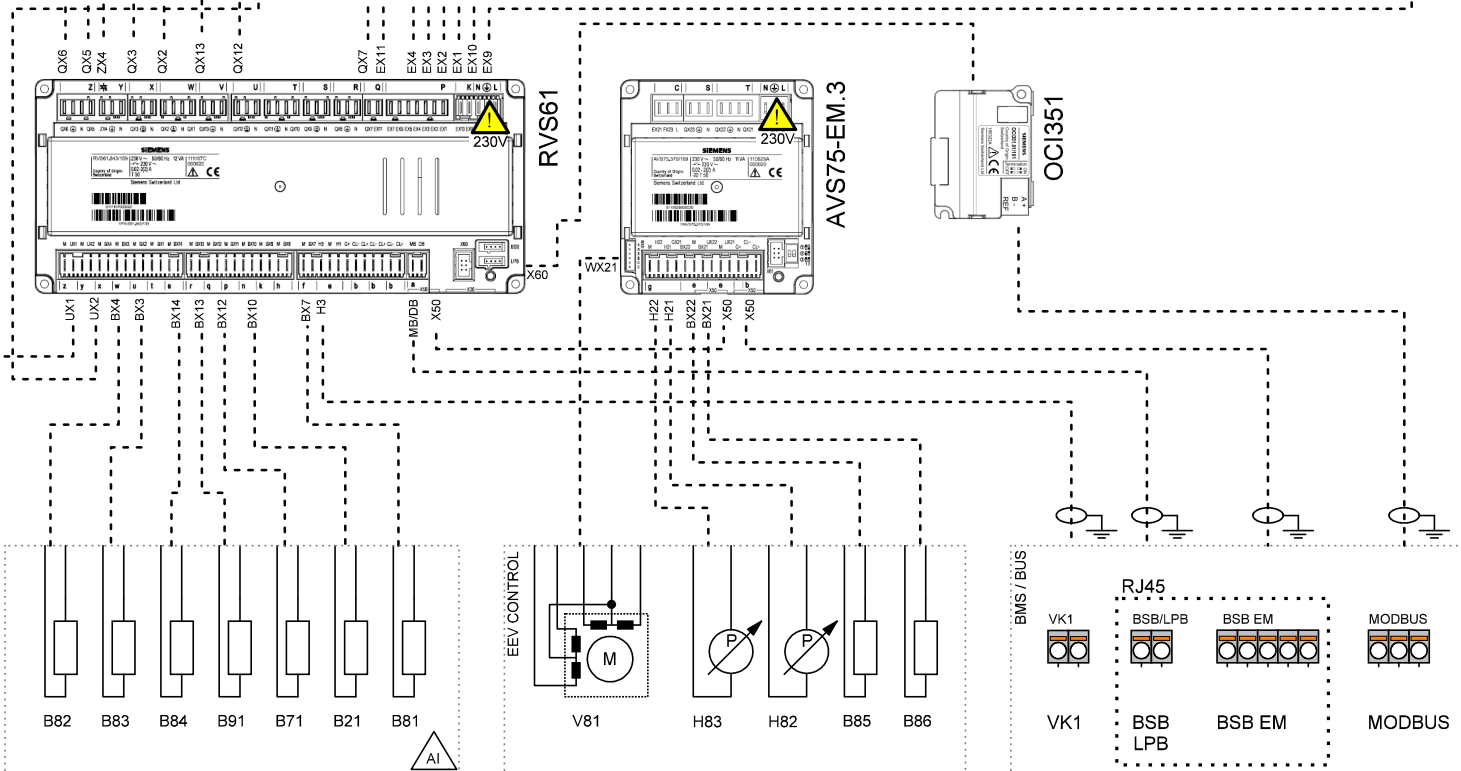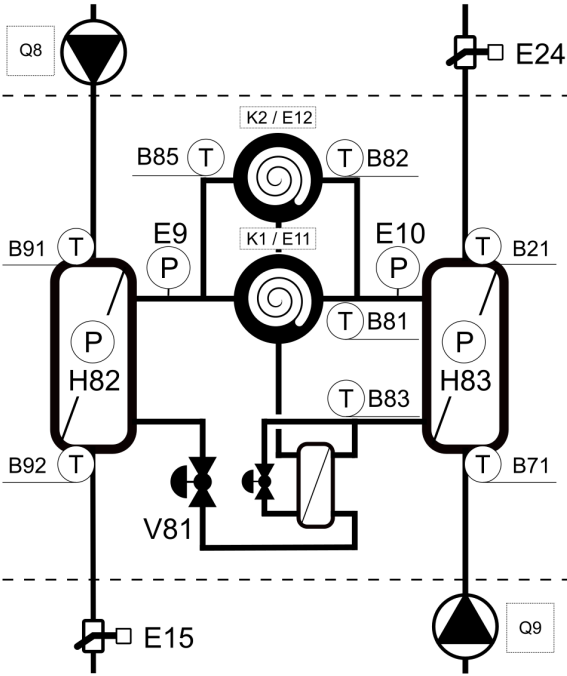

PWR SPLY: 3~ 400V, 50 Hz
CTRL: 1~ 230V, 50 HZ

Company

Title

Version / Note

Number

Created by


Date

Page

TBW-TWW

05/2024

1

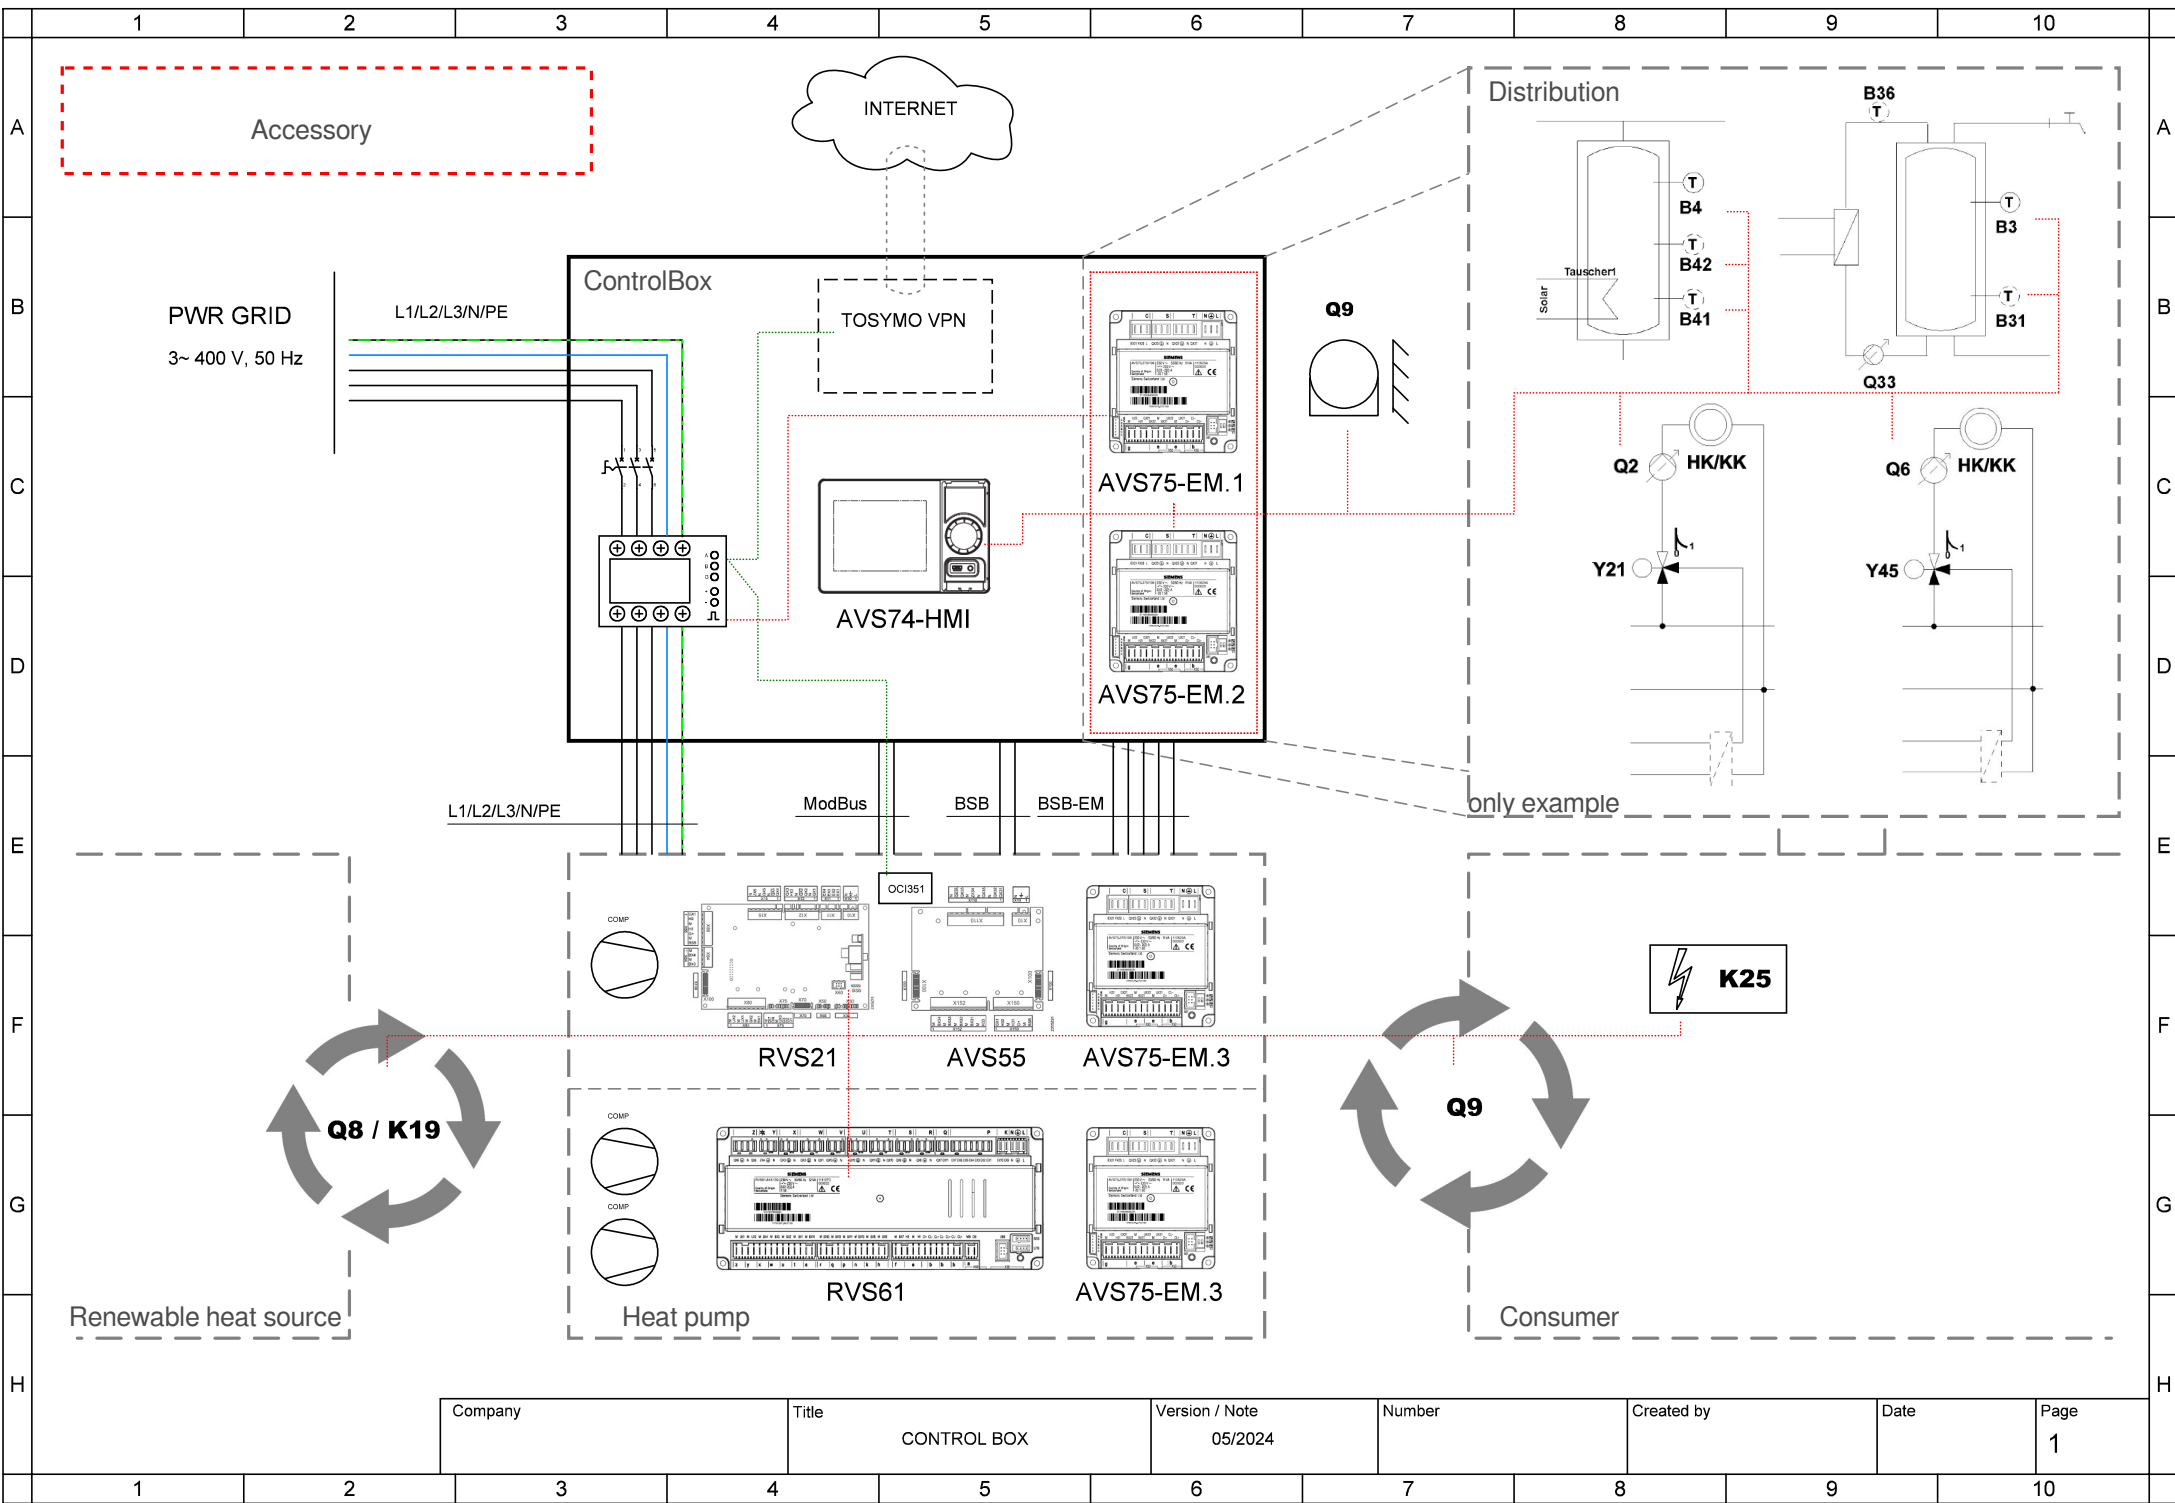

Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				1



Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				2



Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				3



Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				4


- AVS75.390
- AVS75.391
- AVS75.370

- AVS75.370**
 Main power supply 230V / 50 Hz
 Ground
 Neutral conductor
Y1 Mixing valve Open

Y2 Mixing valve Close

Q2 Heat circuit pump HC1 Q2

L Phase 230V
E61 Smart grid E61

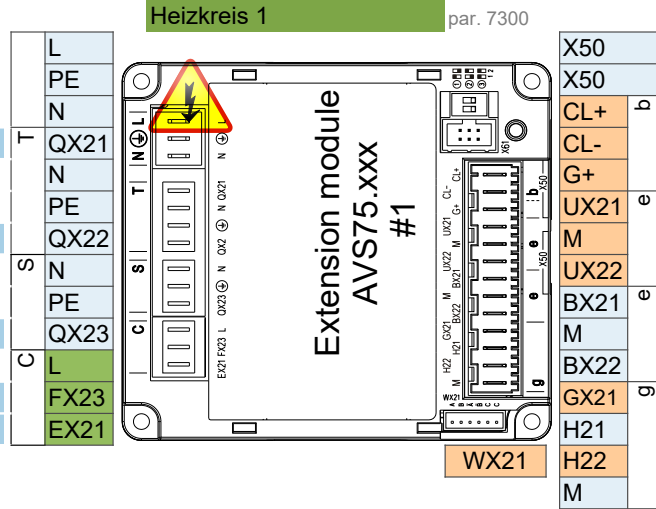

- Extension module AVS75.xxx
 Room unit QAA...
 Room unit QAA...

B1 Flow sensor 1


 Pulse count

- AVS75.370**
 Main power supply 230V / 50 Hz
 Ground
 Neutral conductor
Q3 DHW ctrl elem Q3

K6 El imm heater DHW K6

Q6 Heat circuit pump HC2 Q6

L Phase 230V
E62 Smart grid E62

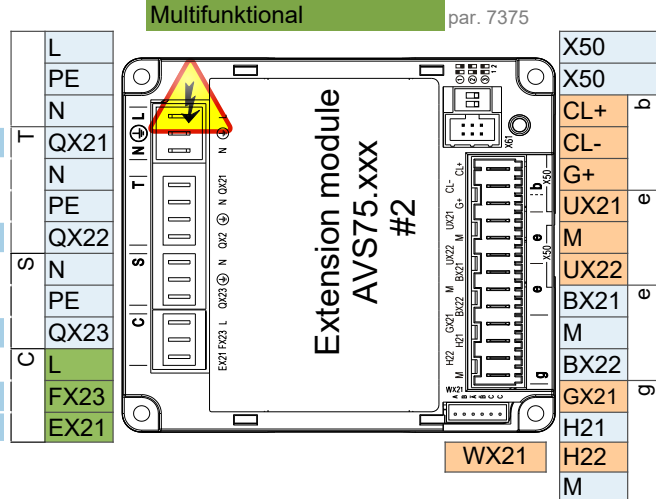


- Operating unit (HMI) AVS37.xxx
 Extension module AVS75.xxx
 Room unit QAA...
 Room unit QAA...

B3 DHW sensor B3

B4 Buffer sensor B4

- Main power supply 230V / 50 Hz
 Ground
 Neutral conductor

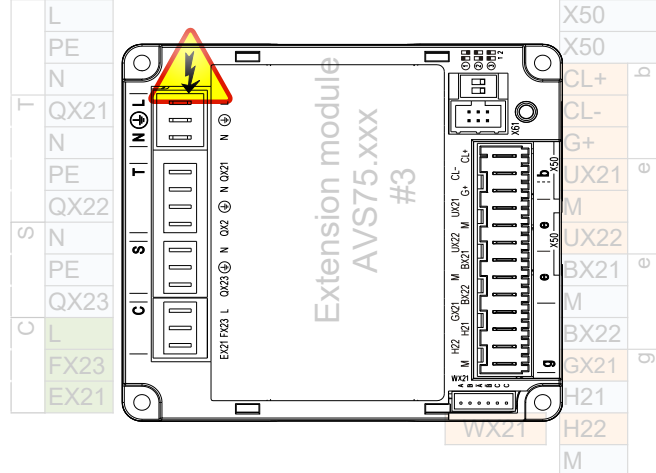

- Operating unit (HMI) AVS37.xxx
 Extension module AVS75.xxx
 Room unit QAA...
 Room unit QAA...

Attention: Extension module 3 is inside the heat pump

Control connection options

1 ControlBox

ControlBox, with two built-in extension modules, enables numerous options for application control on the consumer side behind the heat pump. For more, see the ControlBox schematic and the application diagrams sheet.

2 Fix flow temperature setpoint - On / Off dry (potential free) contact

2 wire shielded cable 2 x 0.5 mm² - Setpoint = 45°C (editable by param. 1859)

Connection terminal - see wiring diagram

3 Analog 0..10V flow temperature setpoint control

2 wire shielded cable 2 x 0.5 mm² - Setpoint: 0V = 16°C ~ 10V = 60°C (editable in parameter set)

Connection terminal - see wiring diagram

4 ModBus RTU communication command

3 wire shielded cable min. 3 x 0.25mm²

For ModBus mapping table contact technical support

5 MQTT IoT communication protocol

For more information contact technical support